



CHARGING THE SHS300 SOLAR ALARM

In the event of issues with the battery charge on the SHS300 Solar Siren it is recommended to charge the internal battery to provide a good initial charge.


To achieve this you will require a suitable 12V DC power supply unit delivering 1-2 amps and a suitable cable to attach to the SHS300.

In order to charge the SHS300 Solar Alarm please follow this procedure:-

- Turn off the siren
- Remove the seven philips screws on the back (outside edge) of the SHS300.




- Connect a 12V DC power supply to the + POWER - Green connector located to the right of Battery/Solar connector

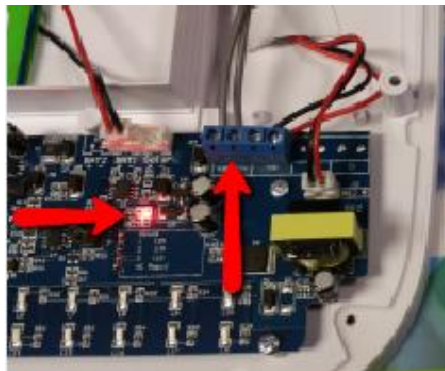

- A Red light will illuminate during the charging cycle (approx 4 hours)

For technical support, please contact your local distributor.
Alternatively, call 0871 222 1430

- Once charged the Red light will turn to Blue. (PSA Photo)

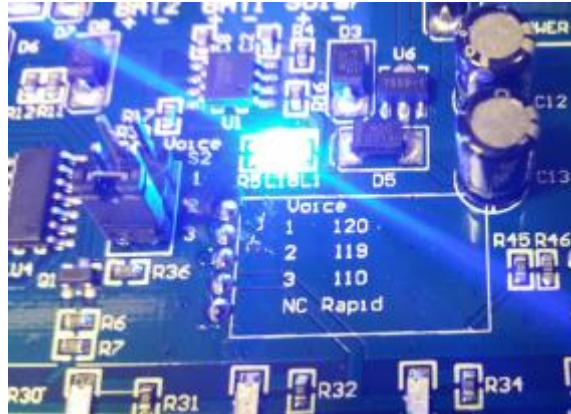

- Now turn the siren back on (pair to the gateway again if required) and test.

For technical support, please contact your local distributor.
Alternatively, call 0871 222 1430