

# Uface Portable Kit



## Versatile AI Facial Recognition Terminal

Uface Portable Kit is a versatile intelligent terminal that supports rich extensibility, Support vertical placement on desktop. Built-in rechargeable battery.



Access Control



Battery backup



Live Detection






Touch Screen



4G



QR Code

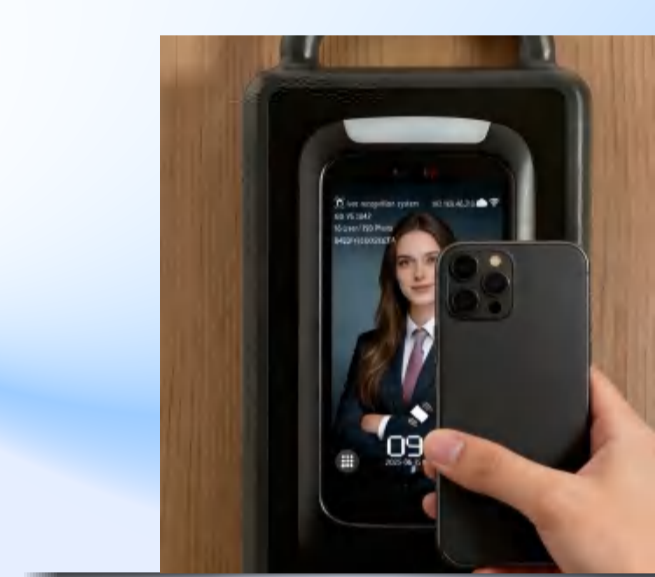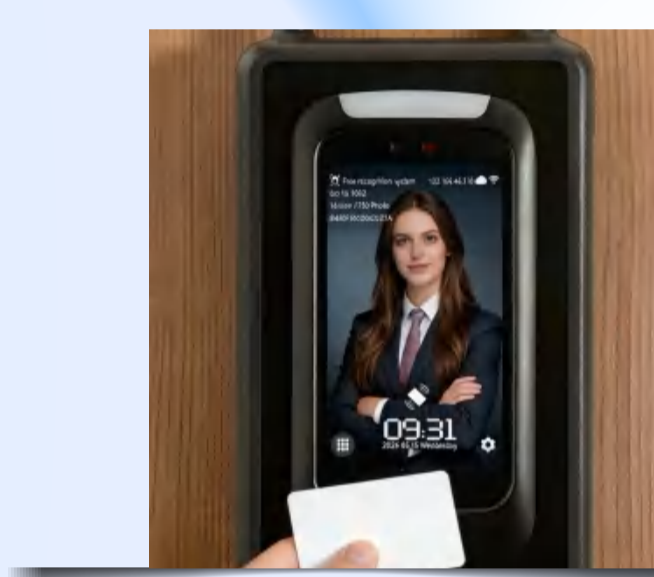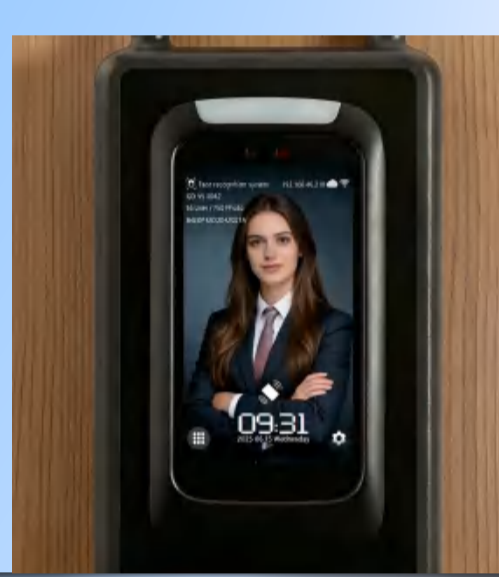

## INTRODUCTION

Uface Portable Kit is a device that can be used in a variety of scenarios. It has a built-in power supply and supports 4G, making it suitable for environments where installation is inconvenient and situations where personnel work in frequently changing locations.

## FEATURES

- Portable, Industrial-grade design
- SIM-Based (4G/3G) Connectivity
- Live detection algorithm against most of the photos, videos, and 3D masks attack
- Less than 0.2s high-speed facial verification, with the recognition accuracy of 99.99% (99.77% recognition)
- Stable performance and smooth lines
- Built-in Battery backup, with LVP
- Register standard 10,000 faces

## SPECIFICATIONS

|                     |  |
|---------------------|--|
| MODEL NAME          | Uface Portable Kit   |
| <b>CAPACITY</b>     |  |
| Faces               | 30,000   |
| Cards               | 30,000   |
| Logs                | Max. 200,000 (including 50,000 logs with photos)                       |
| <b>INTERFACES</b>   |  |
| Communication Modes | TCP/IP, WIFI, Bluetooth, 4G  |
| I/O                 | Power charging interface   |
| <b>FUNCTIONS</b>    |  |
| Face Recognition    | Live detection   |
| Upgrade Modes       | Online   |
| Supported Software  | Standalone, Ustar, Ustar Cloud, Ustar Mobile, Ustar Access, Web Server |
| <b>HARDWARE</b>     |  |
| Memory              | 8GB ROM + 512MB RAM  |
| CPU                 | Dual-core ARM Cortex-A7@900MHz, Linux                                  |
| Screen              | 5-inch TN touch screen   |
| Cameras             | IR, RGB dual-lens camera, Recognition distance (0.3m-3m)               |
| Infrared Fill Light | Supported  |
| Card Modules        | Standard MIFARE Card, NFC  |
| QR Code Module      | 110-byte 3cm*3cm QR Code   |
| ON/OFF Control      | Single built-in ON/OFF switch to control the power                     |
| <b>GENERAL</b>      |  |
| Working Temperature | -10°C~60°C   |
| Storage Temperature | -20°C~60°C   |
| Working Humidity    | 10%-90%  |
| Battery backup      | Backup of 2.5-3 hours, with the replaceable battery pack.              |
| Power Supply        | DC 12V/2A  |
| Power Consumption   | Max. 15W   |
| Dimensions          | 174mm*84mm*18mm  |
| Certificates        | CE, FCC, RoHS  |



Universal Ubiquitous AI Co., Ltd.

16-17F, West Tower T6, UK Center, Euro-America Financial City, Cangqian Street, Yuhang District, Hangzhou  
E-mail: os\_sales@uni-ubi.com