

USER MANUAL

BioTime 7.0

V1.1 APR 2018

CONTENTS

| | |
|---|-----------|
| GLOSSARY | 3 |
| CHAPTER 1 SYSTEM INTRODUCTION..... | 5 |
| 1.1 SYSTEM FUNCTION INTRODUCTION..... | 5 |
| 1.2 BASIC SYSTEM USE PROCEDURE..... | 5 |
| CHAPTER 2 SYSTEM MANAGEMENT | 7 |
| CHAPTER 3 PERSONNEL MANAGEMENT | 9 |
| 3.1 DEPARTMENT MANAGEMENT | 9 |
| 3.1.1 Adding a department..... | 9 |
| 3.1.2 Editing a department..... | 10 |
| 3.1.3 Canceling a department..... | 10 |
| 3.1.4 Setting a department..... | 10 |
| 3.1.5 Setting an Approver | 10 |
| 3.2 POSITION MANAGEMENT..... | 11 |
| 3.2.1 Adding a position..... | 11 |
| 3.2.2 Editing a position..... | 12 |
| 3.2.3 Deleting a position..... | 12 |
| 3.3 PERSONNEL MANAGEMENT | 12 |
| 3.3.1 Adding an employee..... | 12 |
| 3.3.2 Deleting an employee..... | 15 |
| 3.3.3 Resynchronizing information to devices | 15 |
| 3.3.4 Deleting a fingerprint template..... | 15 |
| 3.3.5 Deleting a face template..... | 15 |
| 3.3.6 Adjusting personnel..... | 16 |
| 3.4. PERSONNEL RESIGNATION | 16 |
| 3.4.1 Adding an employee for resignation | 16 |
| 3.4.2 Disabling Attendance..... | 16 |
| 3.4.3 Reinstating an employee from resignation..... | 16 |
| 3.5 CARD ISSUING TO EMPLOYEES..... | 17 |
| 3.5.1 Issuing a card..... | 17 |
| 3.5.2 Issuing cards in batches | 17 |
| 3.6 DOCUMENT SETUP | 18 |
| CHAPTER 4 DEVICE MANAGEMENT | 19 |
| 4.1 SETTING AN AREA..... | 19 |
| 4.1.1 Adding an Area..... | 19 |
| 4.1.2 Deleting an Area | 19 |
| 4.1.3 Editing an Area..... | 19 |
| 4.1.4 Synchronizing Device Data..... | 20 |
| 4.2 DEVICE MANAGEMENT..... | 20 |
| 4.2.1 Adding a T&A Device | 21 |
| 4.2.2 Editing a Device..... | 21 |
| 4.2.3 Deleting a Device | 22 |
| 4.2.4 Clearing an Attendance Photo..... | 22 |
| 4.2.5 Clearing Records..... | 22 |
| 4.2.6 Clearing a Device Command..... | 22 |
| 4.2.7 Matching Attendance Data..... | 22 |
| 4.2.8 Uploading Transaction..... | 23 |
| 4.2.9 Rebooting a Device..... | 23 |
| 4.2.10 Reading Device Information..... | 23 |
| 4.2.11 Synchronizing Software Data to Devices..... | 23 |
| 4.2.12 Upload Data Again | 23 |
| 4.3 DEVICE SHORT MESSAGE MANAGEMENT | 23 |
| 4.3.1 Adding a Public Message..... | 23 |
| 4.3.2 Adding a Private Message | 24 |
| 4.3.3 Issuing a Short Message to Devices | 24 |
| 4.4 REAL TIME MONITORING..... | 24 |
| 4.5 WORK CODE..... | 25 |
| 4.5.1 Adding Work Code and uploading to Device..... | 25 |
| 4.6 MOBILE APP..... | 25 |
| 4.6.1 Adding a Mobile App User | 26 |
| 4.6.2 Delete a Mobile App Record | 26 |
| 4.6.3 Push Notification..... | 26 |
| 4.6.4 Force Offline..... | 26 |
| 4.6.5 Disable and Enable..... | 26 |
| CHAPTER 5 ACCESS CONTROL | 27 |
| 5.1 ACCESS TIME ZONES | 27 |
| 5.1.1 Adding Access Time Zone..... | 27 |
| 5.2 HOLIDAYS | 27 |
| 5.3 DOOR | 27 |
| 5.4 ACCESS LEVELS..... | 28 |
| 5.5 SET ACCESS BY LEVEL..... | 28 |
| 5.6 SET ACCESS BY EMPLOYEE | 28 |

| | |
|---|-----------|
| 5.7 ANTI-PASSBACK | 29 |
| 5.7.1 Adding anti-passback | 29 |
| 5.8 ACCESS GROUP | 29 |
| 5.8.1 Adding Access Group | 29 |
| 5.9 COMBINED VERIFICATION..... | 30 |
| 5.9.1 Adding Combined Verification..... | 30 |
| CHAPTER 6 ATTENDANCE MANAGEMENT | 31 |
| 6.1 ATTENDANCE PARAMETERS | 31 |
| 6.1.1 Global Rule | 31 |
| 6.1.2 Rules..... | 32 |
| 6.2 SHIFT TIMETABLE | 32 |
| 6.2.1 Adding a Normal Timetable | 32 |
| 6.2.2 Adding a Flexible Timetable..... | 33 |
| 6.2.3 Editing a Timetable | 34 |
| 6.2.4 Deleting a Timetable..... | 34 |
| 6.3 SHIFT MANAGEMENT | 34 |
| 6.3.1 Adding a Shift | 35 |
| 6.3.2 Maintaining a Shift..... | 35 |
| 6.4 STAFF SCHEDULING..... | 36 |
| 6.4.1 Personnel Scheduling | 37 |
| 6.4.2 Querying Schedule Details..... | 38 |
| 6.4.3 Clearing Schedule Records | 39 |
| 6.5 ATTENDANCE ON HOLIDAYS..... | 39 |
| 6.5.1 Adding a Holiday for Attendance | 39 |
| 6.5.2 Editing a Holiday for Attendance | 39 |
| 6.5.3 Deleting a Holiday for Attendance | 39 |
| 6.6 ATTENDANCE APPROVALS | 40 |
| 6.6.1 Leave..... | 40 |
| 6.6.2 Manual Punch..... | 42 |
| 6.6.3 Overtime..... | 42 |
| 6.7 TRANSACTION | 43 |
| 6.7.1 U Disk Import..... | 43 |
| 6.7.2 Auto Export..... | 44 |
| 6.8 ATTENDANCE REPORT | 44 |
| 6.8.1 Attendance Statistics..... | 44 |
| 6.8.2 Attendance Report | 45 |
| 6.9 ZONE USER MANAGEMENT | 46 |
| CHAPTER 7 PAYROLL FUNCTION | 47 |
| 7.1 BASIC SETTING..... | 47 |
| 7.1.1 Formula Sign..... | 47 |
| 7.1.2 Currency | 47 |
| 7.1.3 Allowance Type | 47 |
| 7.1.4 Deduction Type..... | 47 |
| 7.2 FORMULA..... | 47 |
| 7.2.1 OT formula | 47 |
| 7.2.2 Exception Formula..... | 47 |
| 7.2.3 Leave Formula | 47 |
| 7.3 SALARY STRUCTURE | 48 |
| 7.4 SALARY CHANGE | 48 |
| 7.5 ALLOWANCE | 48 |
| 7.6 DEDUCTION | 48 |
| 7.7 EXPENSE | 48 |
| 7.8 CASH ADVANCE..... | 48 |
| 7.9 PAYROLL REPORT | 48 |
| 7.9.1 Salary Formula Report | 48 |
| 7.9.2 Salary Change Report | 49 |
| 7.9.3 Salary Detail Report | 49 |
| 7.9.4 Monthly Salary Report | 49 |
| 7.9.5 WPS Report | 49 |
| CHAPTER 8 SYSTEM SETTINGS | 51 |
| 8.1 SYSTEM USER MANAGEMENT | 51 |
| 8.1.1 Role Management | 51 |
| 8.1.2 User Management | 51 |
| 8.2 COMPANY SETTINGS | 52 |
| 8.3 ALERT SETTING | 53 |
| 8.3.1 Mail Setting..... | 53 |
| 8.3.2 Alarm Settings | 53 |
| 8.3.3 Approval Alert..... | 53 |
| 8.3.4 E-mail Template..... | 53 |
| 8.3.5 E-mail Sending Test..... | 54 |
| 8.4 LOG RECORD | 54 |
| 8.5 DATA CLEANING..... | 54 |
| CHAPTER 9 APPENDICES | 55 |
| APPENDIX 1 | 55 |
| APPENDIX 2 END USER LICENSE AGREEMENT | 60 |

GLOSSARY

Absence: Based on attendance parameter settings, the case of no check-in or check-out in attendance statistics can be counted as absence, or late arrival/early leave for more than N minutes in attendance parameter settings can be counted as absence.

Actual Attendance Time: It refers to the actual attendance time of an employee on which statistics are collected based on the check-in/out record in due attendance time during the start and end time. The default unit is workday, and the statistical rule can be changed in Attendance > Calculation Item > Expected/Actual.

Attendance Duration (Time): It refers to the time span between actual check-in time and actual check-out time.

Attendance Status: It refers to what type of the attendance for punching will be counted in the attendance result. By default, the system has eight statuses: Check-In, Check-Out, Dinner-Start, Dinner End, OT-In, OT-Out, Break-Out, and Break-In.

Attendance Timetable: It refers to the timetables possibly used during attendance settings and configuration of all parameters such as work start/end time, permissible time for late arrival/early leaving, whether check-in/ out is mandatory, permissible check-in/out time range, break time, and overtime. This is the minimum unit in attendance time settings.

Auto Overtime: When the punching time is later than work end time, this parameter determines whether the excessive time is counted as overtime.

Correction of Status: It refers to determine whether an employee checks in or out by following the attendance calculation rule according to the shift timetable and attendance time of this employee. The calculation is based on this status during statistics.

Due Attendance Time: It refers to the duration when an employee should be at work from the start time to the end time based on staff schedule. The default unit is workday, and the statistical rule can be changed in Attendance > Calculation Item > Expected/Actual. Specifically, the value is determined based on the unit (workday, hour and minute) as well as counted workdays and work minutes in the shift timetable.

Due Check-in/Due Check-out: Due Check-in/Due Check-out refers to mandatory check-in/out time in timetable setting. Yes means check-in/check-out is mandatory, and No means check-in/check-out is optional.

Early Leave: Early leave includes the time setting for corresponding timetable and the setting of starting calculation of early leave, and whether actual check-out time is earlier than due check-out time in the timetable. On the other hand, if Mandatory Check-out in the timetable is set to Yes and the attendance parameter is Ending Work Without Check-out is counted as Early Leave for N Minutes, the actual time without check-out is counted as early leave for N minutes. The time of early leave does not affect the work minutes for attendance calculation.

Exception: It refers to the leave time during this timetable.

Flexible Shift: It refers to a default attendance shift set in the system. It is a cycle of flexible timetable within a week. If an employee works in a flexible schedule and attendance checking is required, a flexible shift can be arranged. If an employee has a punching record without a shift arranged, the attendance is calculated based on flexible shifts and classified as some overtime such as overtime on days off or on holidays. The flexible shift is applicable to business owners, business personnel, service staff and order-oriented production people.

Flexible Timetable: It refers to a default timetable set in the system. In the settings of a flexible timetable, the work delay is not counted as overtime, and late arrival, early leaving or absence is not counted. The attendance calculation for a flexible timetable is second punching time minus first punching time, fourth punching time minus third punching time, and so on. The line numbers of its report are generated automatically. If four records exist, the daily report on that day has two lines. If six records exist, the daily report has three lines. Besides, the attendance time in a timetable is check-out time minus check-in time of this timetable.

Late Arrival: Late arrival includes the time setting for corresponding timetable and the setting of starting calculation of late arrival, and whether actual check-in time is later than due check-in time in the timetable. On the other hand, if Must Check-in in the timetable is set to Yes and the attendance parameter is No Check-in, Count as Late 60 Minutes, the actual time without

check-in is counted as late arrival for N minutes. The time of late arrival does not affect the work minutes for attendance calculation.

Must Check-in/Check-out: In some companies, only check-in or check-out is carried out. If check-in or check-out is set to be mandatory, corresponding items are included in the range of attendance.

No Check-in/No Check-out: No Check-in/No Check-out refers to the times of no actual implementation in the times of due check-in/due Check-out.

Permissible Late Arrival/Early Leaving: It refers to the permissible time for late arrival/early leaving before the designation of late arrival/early leaving starts during specified work time.

Role: When using the system, a super user needs to assign different levels to new users. To avoid setting users one by one, you can set roles with specific levels in role management, and assign appropriate roles to users when adding users.

Schedule: It refers to what kind of shift will be used in a timetable for employee attendance. It is a main basis for calculating attendance results. If an employee works in a flexible schedule and attendance checking is required, a flexible shift can be arranged. If an employee has a punching record without a shift arranged, the attendance results are calculated as overtime based on flexible shifts.

Shift: It refers to a preset work schedule for the personnel and is composed of one or more preset attendance timetables based on certain order and cycle period. For employee attendance, the employee shifts to be used must be set first.

Start/End Check-in: It refers to a timetable which is the valid range of check-in. The check-in records out of this range are invalid.

Start/End Check-out: It refers to a timetable which is the valid range of check-out. The check-out records out of this range are invalid. The check-out start time cannot overlap the check-in end time.

Super user: It refers to a user with all operation permissions of the system. A superuser is able to assign new users (such as company management personnel, registrars or attendance administrators) and configure corresponding user roles.

Temporary Schedule: If the shifts on some dates are adjusted due to temporary changes of employee work time after scheduling, the temporary schedule can be used. Temporary schedule can be set as only temporarily valid or appending to an employee shift (two schedule records in the attendance statistics in this case). This mode of schedule is very applicable to the posts without fixed schedules.

Time in a Timetable: It refers to the work time of an attendance timetable in the shift setting on that day.

Unit/Minimum Unit: The unit covers day, hour and minute and the minimum unit is a numeric value. The combination of these two is used to set the minimum computing unit of a parameter in statistics such as one day, one hour or one minute. For example, the minimum unit of leave is set to one hour. When rounding-off is enabled, the value 1.5 is counted as two hours and the value 1.4 is counted as one hour after rounding-off.

Work Minute: In normal attendance, the work minute is the time set in Work Minute of a shift timetable. When the valid attendance duration in a shift timetable is smaller than the time set in Work Minute of a shift timetable, the valid attendance duration prevails. When the valid attendance duration in a shift timetable is larger than the time set in Work Minute of a shift timetable, the time set in Work Minute of the shift timetable prevails. The work minute in a flexible shift is 0.

Work time: It refers to the time between an employee's work start time and end time (measured in minutes). The filled value may not be equal to the actual interval between punching in and out. The value may be larger or smaller than this interval, depending on the company system. Normally, this value can neither larger than 480 nor smaller than 0. If this value is 0, this timetable is overtime and needs not to be counted as work time. The system will automatically count this timetable as overtime.

Chapter 1 System Introduction

1.1 System Function Introduction

This system implements unified management for customers in terms of time and operation safety and helps the customers continuously improve safety management efficiency, so as for simpler and more reasonable time management as well as more value.

System Features

1. With powerful data handling capacity, the system can manage the attendance data of 10,000 employees.
2. The visual and reasonable operation procedure integrates years of attendance management experience.
3. The automatic user list management makes management more scientific and efficient.
4. The permission management based on multiple-level management roles guarantees user data security.
5. The real-time data collection system ensures that administrators can acquire attendance data in time.

Requirements of Server Hardware Configuration

CPU: basic frequency more than 2.0 GHz

Memory: 2 GB and above

Hard disk: Available space of 100 GB and above. It is recommended to use an NTFS hard disk partition as the software installation directory. (An NTFS hard disk partition provides better performances and higher security)

Software Operating Environment

Supported operating system: Windows7 (64-bit)/8/8.1/10, Server2003/2008/2012/2014/2016

Supported database: MS SQL Server2005/2008, Oracle 11g, MySQL, PostgreSQL

Supported mainstream browser: IE 11+, Chrome 33+, Firefox 27+

Functions

This system mainly consists of the following functional modules:

- **Personnel system:** The personnel system includes three parts: department management settings for setting the company's main architecture; employee management settings for entering employee information into system, allocating employees to departments and then conducting employee maintenance; card issuing to employees in the system so that the employees swipe cards for attendance.
- **Device system:** Set the communication parameters for connecting to devices. The communication with devices is successful only after communication parameters are set correctly, including the settings in both the system and devices. After the communication is successful, you can view the information on the connected devices and perform operations on them such as remote monitoring, uploading, and downloading.
- **Access Control:** Assign time zones and holidays and set access from doors by level or by employee. In this function, you can also set an anti-passback function.
- **Attendance system:** Achieve the collection and statistics of employee attendance data, data query, improve personnel management, facilitate employee check-in, facilitate the statistics and assessment of employee attendance conducted by management staff, facilitate the query and assessment of attendance rate in each department conducted by management staff, well understand employee attendance and effectively manage and understand employee turnover.
- **Payroll:** In this function, salary of each employee can be defined along with the allowances, deduction, expenses, and cash advance. Payroll formulas can be assigned also such as OT formula, Exception formula, and leave formula and can set to deduct from employee's salary. It can also export payroll reports in different formats.
- **System setting:** Mainly to assign system users and configure user roles, set the system parameters and manage the system operation logs.

1.2 Basic System Use Procedure

The following takes a superuser as an example to introduce how to use the system. Different users have different operation permissions, so corresponding operation procedures are different. Users need to only follow the procedure below to operate the items displayed on the interface.

Step 1: Log in to the system and modify the default password for your account.

Step 2: Assign accounts and roles for the personnel using the system (such as company management personnel, registrars and attendance administrators).

Step 3: Set common system information such as system parameters, announcements and alerts.

Step 4: Set the department organization architecture according to the company structure and set corresponding position information.

Step 5: Enter employee information, issue cards to the employees, and conduct daily maintenance.

Step 6: Set the regional structure of the company, add a T&A device for the system, and configure basic information about the device.

Step 7: Set the attendance parameters. You can use the default settings or modify the settings as required.

Step 8: Set the attendance timetables which may be used during attendance, and set relevant parameters.

Step 9: Set the shifts frequently used in attendance system, that is, the cycle combination modes of attendance timetables within the time interval.

Step 10: Schedule the shifts for employees and set which employees are in which shifts. For an employee with the shift arranged, if a temporary change occurs, the temporary schedule can be used for setting.

Step 11: Conduct attendance maintenance. During daily attendance, because of abnormalities, the settings of leave, holiday, and compensatory leave are required.

Step 12: Enable the system to output an attendance report. The system collects statistics and outputs attendance reports on the basis of attendance period.

Chapter 2 System Management

1. Login


User Login

1. After the program is installed on the server, a user can double-click the program icon on the desktop to access the system login interface.
2. As soon as the user completes program installation on the server, other computers can access this server through network to user this system.
3. Open the browser, enter the server IP address and port number in the address bar and click Enter to access the system login interface.



To use the system on a server, choose **Program > BioTime > BioTime Server Controller** and start the service, and then double-click the shortcut icon of BioTime Home Page on the desktop. The system login interface pops up.


Note: In Windows 7/Vista, right-click **BioTime Controller** and choose **Run as administrator** from the shortcut menu.

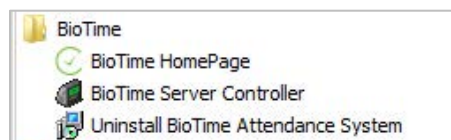

4. When you enter the system, authentication is required to guarantee system security. A superuser (with all operation permissions) is provided for a user using this system for the first time. Enter the username and password, and click **Login** to access the system home interface.


Note: The username and password of the superuser are both admin. After the user logs in to the system for the first time, in order to guarantee system security, use the change password function to change this password. This superuser is able to assign new users (such as company management personnel, registrars and statistics clerks) for the employees inside the company and configure corresponding user roles. For specific operations, please refer to Chapter 8.1.2 “User Management.”

5. After the user log in, the system displays the main interface, as shown in the figure below.

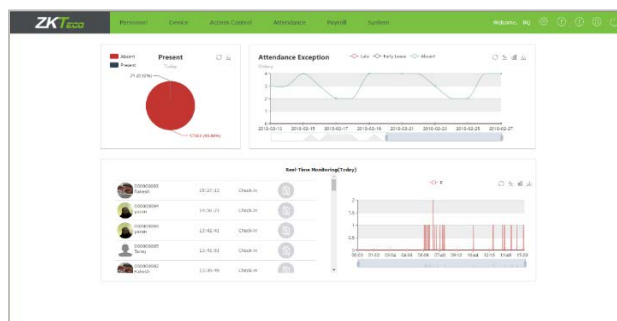


Click a related following function below any panel to quickly access the corresponding interface.


2. Logout

Click the logout button  on top-right of the interface to return to the system login interface, or close the browser directly to log out of the system completely.

After logout, stop the service in BioTime Server Controller and quit the service counter.

3. Preferences

Click the setting button  to access the Settings interface. Enter corresponding information, select system language and click OK to complete setting.

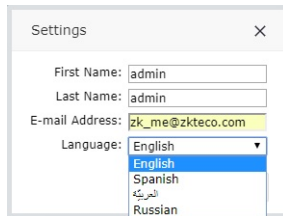


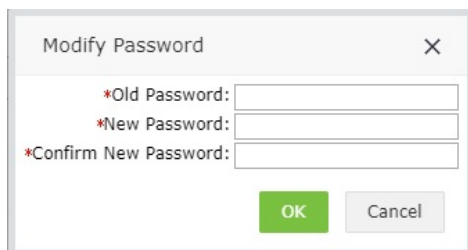
A screenshot of the 'Settings' dialog box. It contains four input fields: 'First Name' with 'admin', 'Last Name' with 'admin', 'E-mail Address' with 'zk_me@zkteco.com', and 'Language' with a dropdown menu. The dropdown menu is open, showing options: 'English', 'Spanish', 'العربية', and 'Russian'. The 'English' option is currently selected.

4. System Manual

This is the system help file. Click  to view the system help file.

5. Change Password

A superuser or new users created by the superuser change their passwords (the default password of new user is 123456) to guarantee safe system operation. Click the change password icon  and the Modify Password interface pops up. Enter the old password, new password, enter the new password again, and click OK to complete change.




A screenshot of the 'Modify Password' dialog box. It contains three input fields: '*Old Password:', '*New Password:', and '*Confirm New Password:'. At the bottom, there are two buttons: 'OK' and 'Cancel'.

Chapter 3 Personnel Management

Before using the attendance function of the system, enter the personnel system for setting first: department settings for setting the main architecture of the company, and personnel settings for entering employees into system, allocating employees to departments and then conducting employee maintenance.

3.1 Department Management

Choose **Personnel > Department** to access the department management interface, as shown in the figure below.

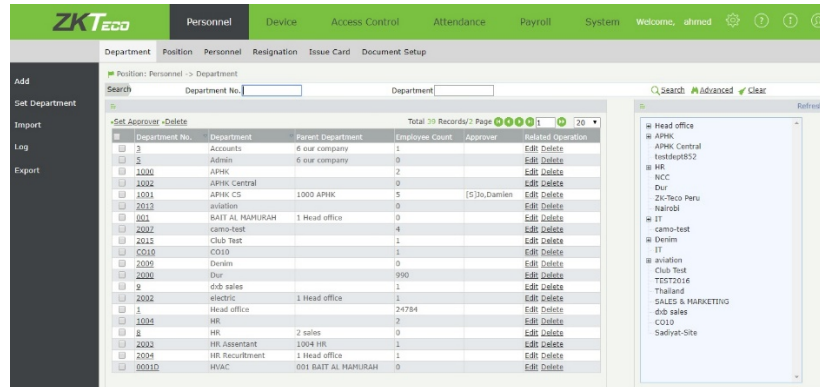

Before managing company personnel, set the department organization structure of the company. When this system is used for the first time, a level 1 department named Department and numbered 1 already exists in the system by default. This department can be edited (modified) but cannot be cancelled.

3.1.1 Adding a department

1. Choose **Personnel > Department > Add** to access the department adding interface, as shown in the figure below.

Set the parameters as required based on the following steps:

Department: Enter the department name which can be composed of any character (a combination of 100 characters at most).

Department No.: The value cannot be the same as any other department number, with a length limit of 20 digits. You can click **Check** to check whether duplication exists.

Parent Department: Click  and select the parent department of this department from drop-down list.

2. After the completion of setting, click **OK** to save the settings (click **Save and New** to add another department) and return to the Department interface, and the information on the new department is displayed in department list. The company's department structure chart is displayed on the right side of the interface in the form of department tree. Click **Refresh** to refresh the department tree.

Notes:

- You can click Import to import the department information in other software or data into this system. For specific operations, please refer to "Import" in Appendix 1.
- You can click Export to export the department data in software locally. For specific operations, please refer to "Export" in Appendix 1.

3.1.2 Editing a department

If a department change or organization structure change occurs in the company, you can modify the department name, number and parent department.

1. Click **Department** of the department to be modified directly or click **Edit** under Related Operation in the line of the department to be modified to access the editing interface.
2. After modification, click **OK** to save the modified department information.

3.1.3 Canceling a department

1. Click ☐ to select the department to be canceled, and then click **Delete** on upper left of the department list or directly click **Delete** under Related Operation in the line of the department to be deleted to access the confirmation interface for department canceling.
2. Click **OK** for confirmation of canceling the selected department.

Notes:

- Departments cannot be deleted or modified at will. Deleting or modifying a department causes the personnel who belongs to this department to be included to no department. This also causes the failure to query for some historical data. If deletion or modification is indeed required, transfer the personnel in this department to other departments, and then delete the department.
- The number corresponding to a deleted department cannot be used again.

3.1.4 Setting a department

In department setting, you can modify personnel department information and department position information in batches.

1. Choose **Personnel > Department > Set Department** to access the department setting interface.

| Personnel No. | First Name | Department |
|---------------|---------------|-------------|
| 00000001 | ball Thailand | Thailand |
| 00000002 | 0 | APHK |
| 00000003 | 3 | Head office |
| 00000005 | 5 | Head office |
| 00000006 | 6 | Head office |
| 00000007 | 7 | Head office |
| 00000008 | LITON KABIR | Head office |

2. In the personnel list, select the personnel requiring department setting in batches (you can screen personnel by department, name or personnel No.). For specific operations, please refer to "Query Function" in Appendix 1.
3. Select the new department (mandatory) and new position, and click **OK**. The departments and positions of selected personnel will all change.

3.1.5 Setting an Approver

Choose **Personnel > Department > Set Approver** to add the approval for each department.

There are two types of approvals: Single level & Multi-level approvals.

Single Level Approval

The employees can be set by different hierarchal levels approvers. All the subsidiary employees' approval can be done by the approver of just above level.

Example: If employees like 6001,6002 & 6003 are the apporovers.6001 can approve all employees under the department app_testdepartment And 6002 can approve 6001's data. 6003 can approve 6002's data.

Multi-Level Approval

The multi-level approval can be also set by hierarchal level with different employees. But in this case all approver need to confirm the employees application, then only it will be finalized.

Example: All the employees under app_testdept need approval from all these approvers 6001, 6002 & 6003.

Notify option to define the employees who needs the notification for the approvals.

3.2 Position Management

Before setting company personnel, you need to add corresponding position information for the company.

Choose **Personnel** > **Position** to access the Position interface, as shown in the figure below.

| Position No. | Position | Parent Position | Employee Count | Related Operation |
|--------------|-----------|--------------------|----------------|-------------------|
| 1001010 | مدير | 9 Accounts Manager | 0 | Edit Delete |
| 12 | مدير شركة | 1 General Manager | 0 | Edit Delete |
| 1001008 | مدير مكتب | 1 General Manager | 0 | Edit Delete |

3.2.1 Adding a position

1. Choose **Personnel** > **Position** > **Add** to access the position adding interface.

Set the parameters as required based on the following steps:

Department: Click the drop-down list and select the department to which the position belongs.

Parent Position: Select the parent position.

Position: Enter the position title.

Position No.: Enter the position number (exclusive). Click **Check** to check whether the entered position number is exclusive.

2. After the completion setting, click **OK** to save the settings (click **Save and New** to add another position) and return to the Position interface. The information on the new position is displayed in the Position list.

3.2.2 Editing a position

If the related position information changes in the company, you can use the position editing function to modify the position name, number and department.

1. Directly click **Position** or **Edit** under Related Operation in the line of the position to be edited to access the editing interface for modification.
2. After modification, click **OK** to save the modification.

3.2.3 Deleting a position

1. Click ☐ to select the position to be deleted, and then click **Delete** on upper left of the position list. Or directly click **Delete** under Related Operation in the line of position to be deleted to access the confirmation interface for position deletion.
2. Click **OK** for confirmation of deleting the selected position.

3.3 Personnel Management

When starting to use this management system, you need to register personnel in the system or import the personnel information in other software or data to this system. For specific operations, please refer to "Import" in Appendix 1.

3.3.1 Adding an employee

Choose **Personnel > Personnel > Add** to access the personnel adding interface.

Set the parameters as required based on the following steps:

Personnel Profile

- **Personnel No.:** The length cannot exceed nine digits. For an employee no. with the length less than nine digits, one or more 0's are prefixed to make the length 9 digits. The numbers cannot be the same. Click **Check** to check whether a number is exclusive.
- **Department:** Select a department from the drop-down list. (If no department has been set, only the default departments existing in the system can be chosen)
- **Card No.:** Assign card numbers to personnel for attendance checking. Enter the card no. manually or use a card enroller for issuing cards.
- **Password:** Set the personnel password. The black-and-white T&A device supports passwords with only five digits. The color-screen T&A device supports passwords with only eight digits. Passwords with digits exceeding the specified length are cut out by the system automatically. When you change a password, clear the old password in the text box and then enter the new password.
- **Employment Date:** It is set to the current date by default. The employment date is considered as the start date of attendance calculation. The attendance before this date is not calculated in the statistical result.
- **Employment Type:** Select the employment type from the drop-down list. It can be set to Employee or Contractor.
- **Type:** Select the employee type from the drop-down list. It can be set to Permanent or Temporary.
- **Position:** Select the position from the drop-down list.


Employee Photo

1. Click **Browse** and select the photo to be uploaded. After selection, the photo is displayed, as shown in the figure below.

Note: The size of an employee photo cannot exceed 16 KB.



2. Click **OK** to save the settings and return to the Personnel interface. Click  to display a photo in photo form so that you can view the selected user photo, as shown in the figure below.

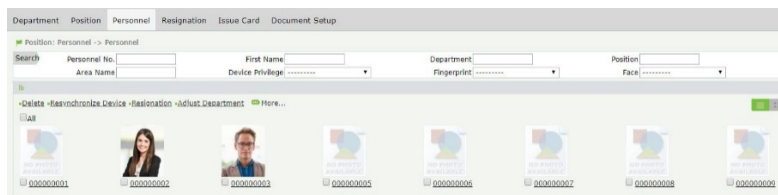

Personnel Details

Click  on the left of Personnel Details to expand Personnel Details and set each parameter as needed.

| | | |
|--------------------------|-------------------|------------|
| Personnel Details | | |
| Work Address: | Office Telephone: | Birthday: |
| Home Address: | Home Telephone: | ID Number: |
| Postal Code: | Mobile Phone: | Email: |
| Social Security Number: | Nickname: | |

Expiry Alert

Set parameters for document expiry alerts.

Expiry on: The expiry date of documents can be set for email alert before the days of expiry.

| | | | |
|---------------------|------------|------------------|-----------------|
| Expiry Alert | | | |
| passport | Expire On: | Email Alert: Yes | Before 0 day(s) |
| visa | Expire On: | Email Alert: Yes | Before 0 day(s) |

Attendance Settings

Click  on the left of Attendance Settings to expand Attendance Settings.

Set Area (headquarters by default if not selected) and Enable Attendance Function (the default value is Yes and No means this employee is not included in the result of attendance statistics). For some top management personnel and temporary personnel requiring no attendance checking, it can be set to No.

Note: For attendance area setting, please refer to Chapter 4.1 "Area Settings."

Personnel Device Permission: Set the permission of a user in the device, with the options including the following four types.

After the completion of setting, click **OK** to save the settings (click **Save and New** to add another employee) and return to the Personnel interface, and the information on the new employee is displayed in the personnel list.

Notes:

- Whether an employee is on the job or not, their numbers must be unique. During verification, the system automatically conducts number query in the resignation library.
- The personnel information is displayed in a list. You can click to display the information as a photo. When you place the cursor on the photo of an employee, details on this employee is displayed, as shown in the figure below.

Access Control Settings

Click on the left of Access Control Setting to expand Access Control Setting.

Access Group: To assign access group per employee.

Authentication Method: The option to select authentication method.

Apply Group Time Zones: The option to enable/disable group time zone.

Access Time Zones: It will display the current timezone assigned for employee.

Payroll Setting

Click on the left of Payroll Setting to expand Payroll Setting.


Bank Name: Field to enter the Bank Name information for each personnel.

Bank Account: Field to enter the Bank Account number for each personnel.

Basic Salary: Field to enter the Basic Salary details for each personnel.

Mobile App Setting

Click on the left of Mobile App Setting to expand Mobile App Setting.

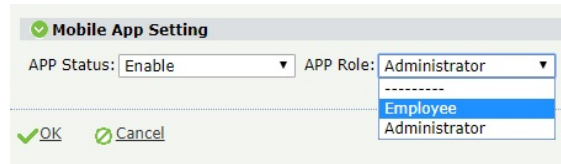


APP Status: Enabling APP status allows a user to use BioTime mobile application. Disabling APP status means a user cannot login to mobile application.

APP Role: This function assign a user to have an Employee or Admin role in the BioTime mobile application.

- **Employee:** Employee mobile interface offers limited functions like clocking-in, viewing attendance status, applying for leave, trainings, and manual punches, etc.
- **Administrator:** Administrator mobile interface allows the user to access all functions of the mobile applications and can view reports, approve or reject applications from the employees, etc.

Note: If you choose to enable the APP status, it will not directly show on the Mobile App interface under Device module. The user should first login to the mobile APP using his Personnel ID and password, then there account details will automatically appear to the Mobile App interface as shown in the image below. Please refer to Chapter 4.6 "Mobile App" for details.

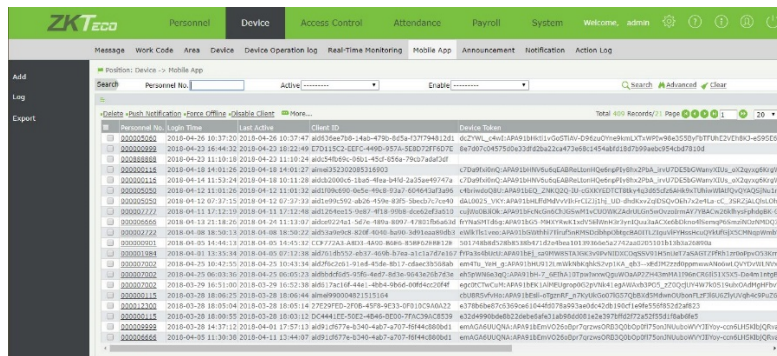

3.3.2 Deleting an employee

1. On the Personnel interface, select the employee (or employees) to be deleted, and click **Delete** on upper left of the personnel list to access the confirmation interface for deletion.
2. Click **OK** to complete the deletion operation.

Note: When you delete an employee, the information on this employee in the database is also deleted.

3.3.3 Resynchronizing information to devices

1. In the personnel list, select an employee (or employees) and click **Resynchronize Device** to access the confirmation interface for synchronizing personnel information.
2. Click **OK** for confirmation and the information on selected employee is synchronized into all devices in the area to which this employee belongs.

3.3.4 Deleting a fingerprint template

1. In the personnel list, select an employee (or employees) and click **More > Delete Biometric Template** to access the confirmation interface for deleting a fingerprint template.
2. Click **OK** for confirmation, and the fingerprint template of the selected employee is deleted, and the fingerprint template of this employee in the devices is also deleted.

3.3.5 Deleting a face template

1. In the personnel list, select an employee (or employees) and click **More > Delete Face Template** to access the confirmation interface for deleting a face template.

2. Click **OK** for confirmation, and the face template of the selected employee is deleted, and the face template of this employee in the devices is also deleted.

3.3.6 Adjusting personnel

Personnel adjustment covers personnel transfer (department adjustment, position transfer, regularization, area adjustment) and resignation.

Personnel Transfer

This includes department adjustment, position transfer, regularization, and area adjustment.

The following uses department adjustment as an example to describe the specific operations.

1. In the personnel list, select an employee, and click **Adjust Department** to access the department adjustment interface.
2. In the Adjusted to Department drop-down list, select the department to which the employee is to be adjusted and enter the information in Transfer Reason and Remark as required.
3. After the completion of the setting, click **OK** to save the settings and return to the Personnel interface.

Note: The operations of area adjustment, regularization and position transfer are the same as the operation of department adjustment and are not described here.

Personnel Resignation

On the Personnel interface, select the employee for resignation, and click **Resignation** to access the personnel resignation interface. For specific operations, please refer to the Chapter 3.4. "Personnel Resignation."

3.4. Personnel Resignation

The operations of personnel resignation cover personnel resignation, reinstatement from resignation and disabling attendance.

3.4.1 Adding an employee for resignation

1. Choose **Personnel > Resignation > Add** to access the new departure adding interface.

The following shows how to perform the operation.

- **Personnel:** Click the drop-down list and select the employee for resignation.
 - **Resignation Date:** Select the date of departure.
 - **Resignation Type:** Select resignation types such as Quit/dismiss/resign/transfer/retain job without salary
 - **Reason:** Enter the reason for resignation as required. It can be left blank.
 - **Whether Blacklisted:** The default value is No, that is, resignation without being blacklisted. The operation of reinstatement from resignation cannot be conducted on the resigned personnel in the blacklist.
 - **Disable Attendance Function:** Tick if attendance needs to be disabled. (If ticked, then personnel details will be removed from the T&A device)
2. After the completion of setting, click **OK** to save the settings and return to the Resignation interface, and the just added employee for resignation will be displayed in the resigned personnel list.

3.4.2 Disabling Attendance

For an employee newly added for resignation with attendance not disabled immediately, follow the following method to disable attendance.

1. In the resigned personnel list on the **Resignation** interface, select the resigned employee whose attendance needs to be disabled, and then click **Disable Attendance Function** above the resigned personnel list to access the confirmation interface for disabling attendance.
2. Click **OK** for confirmation and disabling the attendance of the selected resigned employee.

3.4.3 Reinstating an employee from resignation

Reinstate a resigned employee from the resigned personnel list to the personnel list, delete this employee from the resigned personnel list and recover his/her file.

1. In the resigned personnel list on the **Resignation** interface, click to select the resigned employee who needs to be reinstated from resignation, and then click **Reinstatement** above the resigned personnel list to access the confirmation interface for reinstatement from resignation.
2. Click **OK** for confirmation and reinstating the information of this resigned employee to the (on-the-job) personnel list.

3.5 Card Issuing to Employees

Choose **Personnel > Issue Card** to access the Issue Card interface. You can issue cards to personnel on the Issue Card interface for personnel attendance checking.

Note: During issuing a card to an employee, the card must be placed at the card sticking position of the card enroller. Do not move the card, or else the operation may fail.

3.5.1 Issuing a card

Assign card numbers to personnel for attendance checking. The system supports card issuing with a card enroller or by manually entering card numbers.

How to Use the Card Enroller

The card enroller is connected with a PC through a USB port. Click the card number entering bar, swipe the card on the card enroller, and this card number is automatically displayed on the entering bar.

Specific Card Issuing Procedure

1. Choose **Personnel > Issue Card > Issue Card** to access the card issuing interface.

Parameter Description

- **Personnel:** Click on the right side of Personnel and select an employee from the popped up personnel list.
 - **Card No.:** Enter a card number or obtain a card number by using the card enroller.
2. After the completion of the setting, click **OK** to start card issuing. After the operation is successful, the system automatically returns to the Issue Card interface. Now the related information on this card is displayed in the card information list on the interface.

Note: A card can only be issued to one employee once.

3.5.2 Issuing cards in batches

The specific steps are as follows:

1. Choose **Personnel > Issue Card > Batch Card** to access the batch card issuing interface.
2. Set Start Personnel No. and End Personnel No. ensuring that the entered numbers do not exceed the maximum numbers of personnel number digits supported by the system) then click **Generate List**. Information on all employees without card numbers in this number range is displayed.
3. Enter a card number in the Input Card No. box or obtain a card number by using the card enroller. (The following uses the card enroller for obtaining a card number as an example.)

The personnel with card numbers will not appear on the generated list.

Start Personnel No.:
End Personnel No.:

Issue Card Way: Card Reader
Input Card NO.:

No Card Issued: 0

Issued Cards: 0

| Personnel No. | First Name | Department |
|---------------|------------|------------|
| 000000001 | Taylor | 2 |
| 000000002 | Joe | 3 |
| 000000003 | Mike | 3 |

| Serial No. | Personnel No. | First Name | Department | Card No. |
|------------|---------------|------------|------------|----------|
|------------|---------------|------------|------------|----------|

- Place cards at the card placement position of the card enroller one by one. The card enroller automatically obtains card numbers and starts card issuing from the first employee in the list of personnel without cards assigned. After successful card issuing, the information on related personnel in the list of personnel without cards assigned is automatically cleared. The information (including card numbers) on the personnel with cards issued is displayed in the right list of personnel with cards issued.

Start Personnel No.: 1
End Personnel No.: 3
No Card Issued: 2

Issue Card Way: Card Reader
Input Card No.:
Issued Cards: 1

| Personnel No. | First Name | Department |
|---------------|------------|------------|
| 000000002 | Joe | 3 |
| 000000003 | Mike | 3 |

| Serial No. | Personnel No. | First Name | Department | Card No. |
|------------|---------------|------------|------------|----------|
| 1 | 000000001 | Taylor | 2 | 1234567 |

OK Cancel

- Click **OK** to save the settings and return to the Issue Card interface. The card information list now displays the personnel with cards issued and the information on their card numbers.

| Personnel No. | First Name | Department No. | Department Name | Card No. | Card Status | Date of Issue |
|---------------|------------|----------------|-----------------|----------|-------------|---------------|
| 000000001 | Taylor | 2 | Overseas Sale | 1234567 | Enabled | 2015-06-25 |
| 000000002 | Joe | 3 | Development | 456789 | Enabled | 2015-06-25 |
| 000000003 | Mike | 3 | Development | 789456 | Enabled | 2015-06-25 |

3.6 Document Setup

Choose **Personnel > Document Setup** to access Document Setup interface. You can add document names in this interface, in order to set expiry alert for personnel's as shown in the figure below:

| No. | Document Name | Related Operation |
|--------|-----------------|-------------------|
| 0 | RESIDENCE VISA | Edit Delete |
| 908256 | DRIVING LICENSE | Edit Delete |
| 908255 | LABOUR CARD | Edit Delete |
| 908254 | PASSPORT | Edit Delete |
| 908253 | EMIRATES ID | Edit Delete |

Choose **Personnel > Document Setup > Add** to access Document Setup Add interface.


Chapter 4 Device Management

To use the attendance function, a user must install devices and connect them to the internet first. Then, the user needs to set the corresponding parameters in the system so as to manage connected devices from the system, thereby implementing digital management, including uploading user attendance data, downloading the configuration information, and exporting various reports.

4.1 Setting an Area

Perform area division on devices to make sure various devices and personnel information are set in a designated area. (One device can belong to only one area.) The system will automatically issue the personnel information to the devices in real time and it is unnecessary for users to manually manage personnel information on devices each time.

Choose **Device > Area** to access the area setting interface. The system will set a default area, with the name of Area Name and number of 1.

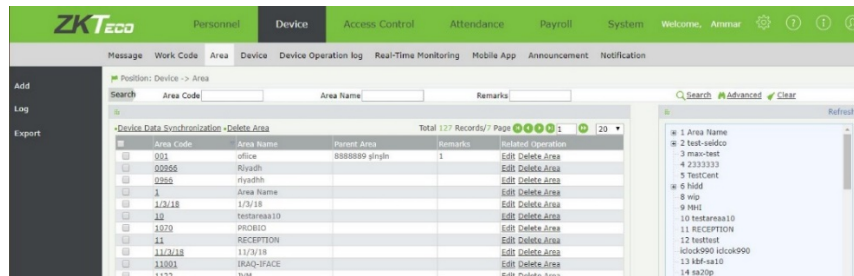

4.1.1 Adding an Area

1. Choose **Device > Area > Add** to access the area addition interface.

Set the parameters as required based on the following steps:

- **Area Code:** Enter a unique area code.
- **Area Name:** Enter an area name.
- **Parent Area:** Select the parent area of this area from the drop-down list. (Optional)

2. After the completion of the settings, click **OK** to save the settings and return to the Area Settings interface. The Area list displays the added area. An area tree will appear on the right of the interface. Click **Refresh** to update the interface.

4.1.2 Deleting an Area

1. In the area list, select the area to be deleted and then click **Delete Area** on the upper left of the area list or directly click **Delete Area** under Related operation in the line of the area to be deleted to access the area deleting confirmation interface.
2. Click **OK** to delete the selected area and return to the area setting interface. The area list no longer displays the deleted area.

4.1.3 Editing an Area

1. In the area list, click an area code, or click **Edit** under Related operation in the line of the area to be edited to access the area editing interface.

2. Modify various parameters as needed. (The modification method is the same as the method of setting parameters in the area adding section.) After modification is completed, click **OK** to save the area information modified.

Message

Work Code

Area

Device

Device Operation log

Real-Time Monitoring

Mobile App

Announcement

Notification

Position: Device -> Area

Search

Area Code

Area Name

Remarks

Device Data Synchronization

Delete Area

Total 127 Records/7 Page 1 20

| Area Code | Area Name | Parent Area | Remarks | Related Operation |
|-----------|-------------|---------------|---------|-------------------|
| 001 | office | 8888889 glnin | 1 | Edit Delete Area |
| 00966 | Riyadh | | | Edit Delete Area |
| 0966 | riyadh | | | Edit Delete Area |
| 1 | Area Name | | | Edit Delete Area |
| 1/3/18 | 1/3/18 | | | Edit Delete Area |
| 10 | testareaa10 | | | Edit Delete Area |

4.1.4 Synchronizing Device Data

Synchronize data in the server to all devices in the designated area. (Generally, this operation needs to be performed only when the data in devices is inconsistent with that in the server due to objective factors, such as the Internet abnormality or other conditions.)

1. In the device list, select the area in which the devices with the data to be synchronized reside and click **Device Data Synchronization** to access the confirmation interface of data synchronization.
2. Click **OK** to reboot the device.

Important tip: The operation of synchronizing the software data to the devices will delete existing data (excluding event records) in the devices at first and then re-download all setting information. It is essential to ensure a smooth Internet connection and avoid power failure during this operation.

4.2 Device Management

Set communications parameters for connecting to devices. The communication with the devices is successful only after parameters on the system and the devices are set correctly. After the communication is successful, you can view the information on the connected devices and you need to change the area of the device then perform operations on them such as remote monitoring, uploading, and downloading.

After a T&A device is connected to the system, if Real-Time Data Upload is checked in the device setting, all attendance records will be automatically uploaded to the system. Otherwise, it is necessary to select a T&A device and click **Synchronize All Data** to synchronize information of all personnel who belong to the same area as the device to the device.

Choose **Device > Device** to access the T&A device management main interface. All connected T&A devices are displayed in a list.

| Message | Work Code | Area | Device | Device Operation log | Real-Time Monitoring | Mobile App | Announcement | Notification | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---------------|----------------|-----------|----------------------|----------------------|--------------|------------------|--------------|-------------|---------------|------------|-----------|--------|---------------|--------------|------------------|------------|----------|---------------|---------------|-----------|---|---------------------|--|--|--|----------|---------------|---------------|-----------|---|---------------------|--|--|--|----------|---------------|--------------|-----------|---|---------------------|--|--|--|----------|---------------|---------------|-----------|---|---------------------|--|--|--|----------|---------------|----------------|-----------|---|---------------------|--|--|--|----------|---------------|-------------|-----------|---|---------------------|--|--|--|----------|---------------|--------------|-----------|---|---------------------|--|--|--|----------|---------------|----------------|-----------|---|---------------------|--|--|--|----------|---------------|---------------|-----------|---|---------------------|--|--|--|
| Position: Device -> Device | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Search Device Name Serial Number Area Name Status | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div> <div>Delete</div> <div>Upload Data Again</div> <div>Sync Data To Device</div> <div>More...</div> <div>Total</div> </div> <table> <tr> <th>Device Name</th><th>Serial Number</th><th>IP Address</th><th>Area Name</th><th>Status</th><th>Last Activity</th><th>Device Model</th><th>Firmware Version</th><th>User Count</th></tr> <tr> <td>auto_add</td><td>0095141600042</td><td>31.167.46.246</td><td>Area Name</td><td>●</td><td>2018-04-23 11:33:01</td><td></td><td></td><td></td></tr> <tr> <td>auto_add</td><td>1234567891234</td><td>83.110.20.151</td><td>Area Name</td><td>●</td><td>2018-04-20 07:38:27</td><td></td><td></td><td></td></tr> <tr> <td>auto_add</td><td>3575154900015</td><td>80.227.52.78</td><td>Area Name</td><td>●</td><td>2018-04-19 11:00:53</td><td></td><td></td><td></td></tr> <tr> <td>auto_add</td><td>3582154900026</td><td>83.110.225.88</td><td>Area Name</td><td>●</td><td>2018-04-23 12:09:40</td><td></td><td></td><td></td></tr> <tr> <td>auto_add</td><td>3582154900040</td><td>217.165.23.100</td><td>Area Name</td><td>●</td><td>2018-04-23 12:09:40</td><td></td><td></td><td></td></tr> <tr> <td>auto_add</td><td>3582154900071</td><td>2.50.26.240</td><td>Area Name</td><td>●</td><td>2018-04-23 12:09:40</td><td></td><td></td><td></td></tr> <tr> <td>auto_add</td><td>3582154900138</td><td>86.98.76.212</td><td>Area Name</td><td>●</td><td>2018-04-23 12:09:40</td><td></td><td></td><td></td></tr> <tr> <td>auto_add</td><td>3582154900139</td><td>176.204.61.225</td><td>Area Name</td><td>●</td><td>2018-04-23 12:09:40</td><td></td><td></td><td></td></tr> <tr> <td>auto_add</td><td>3582154900174</td><td>83.110.213.96</td><td>Area Name</td><td>●</td><td>2018-04-23 12:09:40</td><td></td><td></td><td></td></tr> </table> | | | | | | | | | Device Name | Serial Number | IP Address | Area Name | Status | Last Activity | Device Model | Firmware Version | User Count | auto_add | 0095141600042 | 31.167.46.246 | Area Name | ● | 2018-04-23 11:33:01 | | | | auto_add | 1234567891234 | 83.110.20.151 | Area Name | ● | 2018-04-20 07:38:27 | | | | auto_add | 3575154900015 | 80.227.52.78 | Area Name | ● | 2018-04-19 11:00:53 | | | | auto_add | 3582154900026 | 83.110.225.88 | Area Name | ● | 2018-04-23 12:09:40 | | | | auto_add | 3582154900040 | 217.165.23.100 | Area Name | ● | 2018-04-23 12:09:40 | | | | auto_add | 3582154900071 | 2.50.26.240 | Area Name | ● | 2018-04-23 12:09:40 | | | | auto_add | 3582154900138 | 86.98.76.212 | Area Name | ● | 2018-04-23 12:09:40 | | | | auto_add | 3582154900139 | 176.204.61.225 | Area Name | ● | 2018-04-23 12:09:40 | | | | auto_add | 3582154900174 | 83.110.213.96 | Area Name | ● | 2018-04-23 12:09:40 | | | |
| Device Name | Serial Number | IP Address | Area Name | Status | Last Activity | Device Model | Firmware Version | User Count | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| auto_add | 0095141600042 | 31.167.46.246 | Area Name | ● | 2018-04-23 11:33:01 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| auto_add | 1234567891234 | 83.110.20.151 | Area Name | ● | 2018-04-20 07:38:27 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| auto_add | 3575154900015 | 80.227.52.78 | Area Name | ● | 2018-04-19 11:00:53 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| auto_add | 3582154900026 | 83.110.225.88 | Area Name | ● | 2018-04-23 12:09:40 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| auto_add | 3582154900040 | 217.165.23.100 | Area Name | ● | 2018-04-23 12:09:40 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| auto_add | 3582154900071 | 2.50.26.240 | Area Name | ● | 2018-04-23 12:09:40 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| auto_add | 3582154900138 | 86.98.76.212 | Area Name | ● | 2018-04-23 12:09:40 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| auto_add | 3582154900139 | 176.204.61.225 | Area Name | ● | 2018-04-23 12:09:40 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| auto_add | 3582154900174 | 83.110.213.96 | Area Name | ● | 2018-04-23 12:09:40 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

The above interface shows below columns:

- **Device Name:** It shows the name of the device. For automatically connected devices, it shows auto_add.
- **Serial Number:** It shows the device serial number.
- **IP Address:** It shows the device IP Address.
- **Area Name:** It shows that the device is added in which area as defined in the software.
- **Status:** ● shows connected, ● shows not connected.
- **Device Model:** It shows the name of the model.

- **FV Count:** It shows the number of Finger veins registered.
- **Palm Count:** It shows the number of Palms registered
- **Cmd Count:** It shows the number of commands running in the backend.
- **Firmware Version:** It shows the build firmware version.
- **User Count:** It shows the number of employees already registered on the device.
- **FP Count:** It shows the number of Fingerprints registered.
- **Face Count:** It shows the number of Faces registered.
- **Transaction Count:** It shows the total number of attendance records.

4.2.1 Adding a T&A Device

There are two ways to add a T&A device: manually adding a T&A device and automatically adding a T&A device.

Manually adding a T&A device

1. Choose **Device > Device > Add** to access the device addition interface.

Set the parameters as required based on the following steps:

- **Device Name:** Enter any characters, with 20 characters at most.
 - **Serial Number:** Enter the serial number of the device.
 - **IP Address:** Enter the IP address of the device.
 - **Port No.:** Enter the port No. of the device, with the default value of 4370 in the Ethernet communication mode.
 - **Area:** In the drop-down list, select the area to which the T&A device belongs.
 - **Time Zone:** When a time zone is selected, the time on the T&A device will be automatically synchronized to the standard time in this time zone.
 - **Fixed Transmission Time:** Set the time for the device to automatically transmit data to the system, with the format of MM: SS. If multiple time points are set, please separate them with semicolons.
 - **Real-Time Data Upload:** Select whether to upload data in a real time.
2. After the setting is completed, click **OK** to add the device and return to the device interface. The device list displays the T&A device.

Note: If an employee is added to a device, when the employee information is uploaded to the server, the information will be automatically synchronized to other devices in the same area as the employee on the server.

Automatically adding a T&A device

It is unnecessary to manually add T&A devices of certain models. You can connect such devices to the system via HTTP by completing settings on relevant menus on the devices. After the devices are connected to the Internet, the device list in the system will display the T&A devices. Please refer to relevant user manual for detailed operation procedures.

4.2.2 Editing a Device

Click a device name or click **Edit** under Related operation in the line of the device to be edited to access the device editing interface.

Position: Device -> Device-> Details

Please enter the information of the device; Device Name, Serial Number, IP Address, Port Number and Area are necessary.

*Device Name:

*Serial Number:

*IP Address:

*Port No.:

*Area:

Manage Door:

Time Zone:

Real-Time Data Upload: ☒

Request Interval (second):

Note: Grey items cannot be edited. The device name cannot be the same as the name of another device.

4.2.3 Deleting a Device


Detailed operations are described as follows:

1. Click ☐ to select the devices to be deleted, and then click **Delete** above the device list, or directly click **Delete** under Related operation in the line of the device to be deleted to access the device deletion confirmation interface.
2. Click **OK** to delete the device selected and return to the Device interface. The device list no longer displays the device deleted.

4.2.4 Clearing an Attendance Photo

Users can choose to clear an attendance photo on a T&A device.

1. Click ☐ to select a device and click **More > Clear Att Photo** to access the Clear Att Photo interface.
2. Click **OK** to delete the attendance photo.

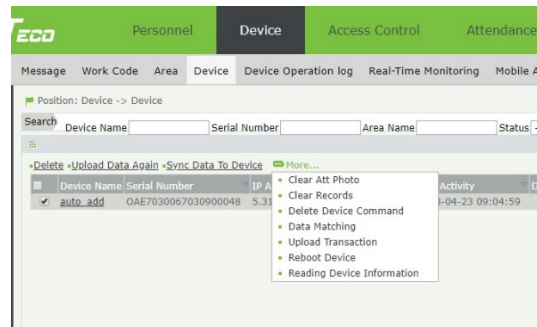

4.2.5 Clearing Records

Clear all records on an A&T device.

1. Click ☐ to select a device and click **More > Clear Records** to access the Clear Records interface.
2. Click **OK** to delete all records.

4.2.6 Clearing a Device Command

Clear the command issued by the software to a device during communication.

1. Click ☐ to select a device and click **More > Delete Device Command** to access the device command clearing interface.
2. Click **OK** to delete device command.


4.2.7 Matching Attendance Data

Users can view whether the attendance records are complete on the software and check them up with the data on the devices.

1. Click ☐ to select a device and click **More > Data Matching** to access the attendance data matching interface.
2. Click **OK** to perform data matching.


Important tip: The data matching operation requires the support of the firmware protocol of T&A devices.

4.2.8 Uploading Transaction

1. Click  to select a device and click **More > Upload Transaction** to access the Upload Transaction interface.
2. Click **OK** to upload transaction after the setting is completed.

4.2.9 Rebooting a Device

Remotely reboot a device via the system.

1. Click  to select a device to be rebooted and click **More > Reboot Device** to access the device rebooting confirmation interface.
2. Click **OK** to reboot the device.

4.2.10 Reading Device Information

Read the number of persons, attendance records, and the firmware version on a device.

1. Select a device and click **More > Reading Device Information** to access the confirmation interface of reading device information.
2. Click **OK** to download the information or click **Cancel** to abort this operation.

4.2.11 Synchronizing Software Data to Devices


Synchronize data in the server to all devices. (Generally, this operation needs to be performed only when the data in devices are inconsistent with those in the server due to objective factors, such as the Internet abnormality or other conditions)

1. In the device list, select the device to which data needs to be synchronized and click **More > Sync Data to Device** to access the confirmation interface for data synchronization.
2. Click **OK** to confirm the synchronization.

Important tip: The operation of synchronizing the software data to the devices will delete existing data (excluding event records) in the devices at first and then re-download all setting information. It is essential to ensure a smooth Internet connection and avoid power failure during this operation.

4.2.12 Upload Data Again

Users can choose whether to upload the personal information on the T&A devices again or whether to upload the attendance records to the server again.

1. Click  to select a device and click **More > Upload Data Again** to access the Upload Data Again interface.
2. Select whether to upload personal information and "attendance records as needed. Click **OK** to upload data after the setting is completed.

Note: You can upload personal information on a T&A device to the server in batches by using the function of uploading data again. If timeout occurs, the uploading is interrupted and you need to perform the operation again.

4.3 Device Short Message Management

To identify different operation types performed by the user on the Device. When you open this interface, you can see the list of operations performed on each device.

Choose **Device > Device Operation Log** to access device operation logs interface.

4.3.1 Adding a Public Message

1. Choose **Device > Message > Public Message**.
 - **Device:** Select a device to which a message needs to be issued from the drop-down list. (You can choose more than one device.)
 - **Short Message Content:** Enter the short message content to be issued.
 - **Start Time:** Select the start time for issuing the short message. Please refer to "Select a Time" in Appendix 1 for the method of selecting time.
 - **Message Duration:** Enter the message display duration.
2. After the completion of the settings, click **OK** to save the settings and return to the short message setting interface. The short message list displays the added short message.

The screenshot shows the 'Add Public Message' form. At the top, there is a navigation bar with tabs: Message, Work Code, Area, Device, Device Operation log, and Real-Time. Below the navigation bar, the breadcrumb path is 'Position: Device -> Message -> Public Message'. The form title is 'Add Public Message'. It contains the following fields:

- *Device: A dropdown menu.
- *Short Message Content: A large text area.
- *Start Time: A text input field.
- *Message Duration (min): A text input field with the value '60'.

 At the bottom of the form are two buttons: 'OK' (with a green checkmark icon) and 'Cancel' (with a green circle and slash icon).

4.3.2 Adding a Private Message

1. Choose *Device > Message > Private Message*

Set the parameters as required based on the following steps:

- **Personnel:** Select the personnel receiving a short message. Please refer to “Personnel Selection” in Appendix 1 for the method of selecting personnel.
- **Short Message Content:** Enter the short message content to be issued.
- **Start Time:** Select the start time for issuing the short message.
- **Message Duration:** Enter the message display duration.

The screenshot shows the 'Private Message' form. At the top, there is a navigation bar with tabs: Message, Work Code, Area, Device, Device Operation log, Real-Time Monitoring, Mobile App, Announcement, Notification, and Action Log. Below the navigation bar, the breadcrumb path is 'Position: Device -> Message -> Private Message'. The form title is 'Private Message'. It contains the following fields:

- Personnel:** A section with search options: 'Search By Department' (selected) and 'Search By Personnel No./Name'. Below these is a button 'Select All Personnel In The Department'. A table displays a list of personnel:

| Personnel No. | First Name | Department |
|---------------|------------|------------|
| 000000001 | 1 | ZKTeco |
| 000000115 | 115 | ZKTeco |
| 000000116 | 116 | ZKTeco |
| 000000117 | 117 | ZKTeco |
| 000000118 | 118 | ZKTeco |
| 000000119 | 119 | ZKTeco |
| 000000120 | 120 | ZKTeco |

 To the right of the table is a 'Selected Personnel (0)' box with a 'Clear' button.
- *Short Message Content: A large text area.
- *Start Time: A text input field.
- *Message Duration (min): A text input field with the value '60'.

 At the bottom of the form are two buttons: 'OK' (with a green checkmark icon) and 'Cancel' (with a green circle and slash icon).

2. After the completion of the settings, click **OK** to save the settings and return to the short message setting interface. The short message list displays the added short message.

4.3.3 Issuing a Short Message to Devices

1. Select the short message to be issued in the short message list, and click *Short Message Issued*.
2. Click **OK** to issue public messages to designated devices and private messages to devices to which designated personnel are added.

4.4 Real Time Monitoring

Real time monitoring is a process through which an administrator can monitor the status and events of devices in the system in real time. When you open this interface, you can see which person is punching at that instant.

Choose *Device > Real-time Monitoring* to access the interface.

The Real Time Monitoring function gives a brief description of the personnel who punched.


Preview

- Personnel No.
- Punch Time
- Status
- Verification Mode
- Device S/N
- Area Name

4.5 Work Code


To add different Work Codes and upload it to single device or multiple devices.

Choose **Device > Work Code** to access Work Code interface.

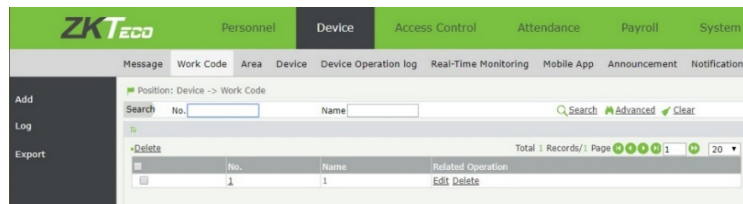

4.5.1 Adding Work Code and uploading to Device

1. Choose **Device > Work Code > Add** to access Work Code adding interface.

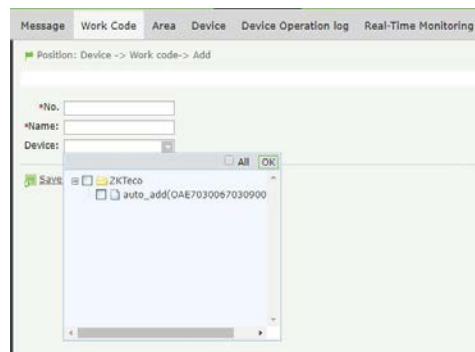


Set the parameters based on the following steps:

- **No.:** Enter the Work Code Number.
 - **Name:** Enter the Work Code Name.
 - **Device:** Choose the device from the device dropdown list, to which work code has to be assigned.
2. After the completion of the settings, click **OK** to save the settings and return to the work code setting interface. All the work code names added will be displayed in the Work Code interface.

4.6 Mobile App

This function allows you to view who are using the mobile application with either an administrator or employee role.

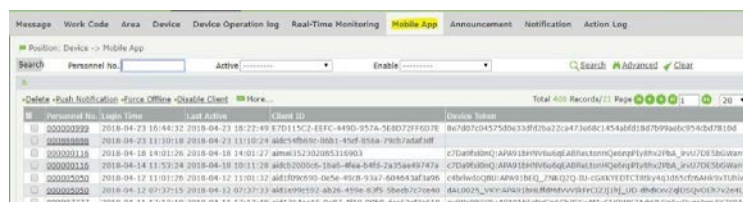

4.6.1 Adding a Mobile App User

For a user to use the mobile app, his/her APP Status should be "Enabled" firstly in the Personnel module (Refer to Mobile App in Chapter 3.3.1 "Adding an Employee").

Note: If you choose to enable the APP status, it will not directly show on the Mobile App interface. The user should first login to the mobile APP using his Personnel ID and password, then there account details will automatically appear to the Mobile App interface.

4.6.2 Delete a Mobile App Record

If a user has been inactive for a long time, the software administrator/HR can delete the user/s by clicking **Device > Mobile App**. Select the user/s you want to delete and click **Delete** or directly click **Delete** under Related Operation.


4.6.3 Push Notification

This function allows the software administrator to send mobile notifications to the mobile app users.

1. Select the users in the list, then click **Push Notification** and enter the details needed.
2. Click **OK** and the users will receive the notifications in their mobile phones.

4.6.4 Force Offline

If a user is active in multiple mobile phones, you can use Force Offline function to turn the other mobile phones inactive. You can see that a user is active or inactive in the Active Status as shown in the image below.

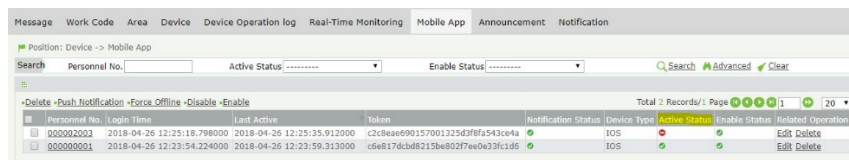


| Personnel No. | Login Time | Last Active | Token | Notification Status | Device Type | Active Status | Enable Status | Related Operation |
|---------------|----------------------------|----------------------------|----------------------------------|---------------------|-------------|---------------|---------------|-------------------|
| 000002003 | 2018-04-26 12:25:18.798000 | 2018-04-26 12:25:35.912000 | c2c8aee690157001325d3f8fa543ce4a | ✓ | iOS | Active | Enable | Edit Delete |
| 000000001 | 2018-04-26 12:23:54.224000 | 2018-04-26 12:23:59.313000 | c6e817dcb8215be8027ee0e33fc1d6 | ✓ | iOS | Inactive | Enable | Edit Delete |

1. Select the active users you want to make inactive, then click **Force Offline**.
2. Click **OK** to confirm.

Notes:

1. You can always turn a user "Active" by clicking the Personnel No. of the user and under Active Status, choose **Active**.
2. If a user log-in to Mobile 1 and tries to log-in again into Mobile 2, he/she will be automatically log-out in Mobile 1 (vice versa). But all the details of Mobile 1 and 2 will be listed in the mobile app interface as shown in the image below.

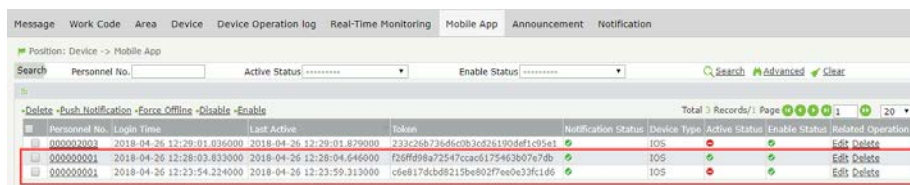

| Personnel No. | Login Time | Last Active | Token | Notification Status | Device Type | Active Status | Enable Status | Related Operation |
|---------------|----------------------------|----------------------------|----------------------------------|---------------------|-------------|---------------|---------------|-------------------|
| 000002003 | 2018-04-26 12:29:01.036000 | 2018-04-26 12:29:01.879000 | 233c26b73d4dc0b3c526180d4f1c95e1 | ✓ | iOS | Active | Enable | Edit Delete |
| 000000001 | 2018-04-26 12:28:03.833000 | 2018-04-26 12:28:04.646000 | f26ff498a72547ccac6175463e07e7db | ✓ | iOS | Inactive | Enable | Edit Delete |
| 000000001 | 2018-04-26 12:23:54.224000 | 2018-04-26 12:23:59.313000 | c6e817dcb8215be8027ee0e33fc1d6 | ✓ | iOS | Inactive | Enable | Edit Delete |

4.6.5 Disable and Enable

This function reflected to the APP Status of a user. Please refer to Chapter 3.3.1 Adding an Employee.

1. Enable: The user can use the mobile app.
2. Disable: The user cannot use the mobile app.

Chapter 5 Access Control

Access control option is to set user's open door time zone, control lock and related device's parameters. The current unlock time should be in the effective time of user time zone or group zone. The group in which the user belongs to must be in an unlock combination (or in the same unlock combination with other groups, but the door can be unlocked only when all the groups in this combination pass verification).



5.1 Access Time Zones

The whole system can define 50 time zones. Every time section is the effective time zone within 24 hours every week. Every time section format is HH:MM-HH:MM, namely, accurate to minute.

Choose **Access Control > Access Time Zone**.

5.1.1 Adding Access Time Zone

The time zone can be defined per week and assign different time.

Choose **Access Control > Access Time Zone > Add** to add different time intervals for the access.

The screenshot shows the 'Add' form for 'Access Time Zones'. It includes a 'Position' dropdown set to 'Access Control -> Access time zones-> Add'. There are input fields for 'Access Time Zones' and 'Remarks'. Below these is a table for defining time intervals for each day of the week. The table has columns for 'Date', 'Time', and three intervals (Interval 1, Interval 2, Interval 3), each with 'Start Time' and 'End Time' sub-columns. The days of the week are listed in the 'Date' column. At the bottom, there are buttons for 'Save and New', 'OK', and 'Cancel'.

- **Access Time Zones:** Enter the AC Time Zone's name.
- **Start and End Time:** Set the Start and End time for each time interval within a week.

5.2 Holidays

The holiday settings can be configured to control the door access on holidays.

5.2.1 Add holiday

Choose **Access Control > Holidays > Add** to assign the timezone for holidays. Also can set the recurrence level for holidays.

5.3 Door

AC time zone is used to set the effective door open time. You can set the AC reader to be valid in a specified time zone only, and you can also set a normal open (NO) time zone of the door. AC time zone can be used to set the access control right to allow the user to only access the specified door (including AC group and unlock combination settings) in the specified time zone. The system implements access control according to the AC time zone setting.

Position: access -> Door-> Details

*Door Name:
 *Lock Delay: s(0-255)

*Door Sensor Type:
 *Door Sensor Delay: s(0-255)

*Retry Times To Alarm:
 *Door Alarm Delay: s(0-255)

Normal Open Time Period:
 Normal Close Time Period:

*Valid Holiday:

5.4 Access Levels

The access levels can be created with time zone and can add door to the access level.
Choose **Access Control > Access Level > Add** door to assign the door to access level.

Access Time Zones Holidays Door Access Levels Set Access By Level

Position: Access Control -> Access Levels

Search Access Levels Access Time Zones

Access Levels

Total 2 Records/1 Page

| Access Levels | Access Time Zones | Related Operation |
|---------------|--------------------|---|
| ss | 24-Hour Accessible | <input type="button" value="Edit"/> <input type="button" value="Add Door"/> |
| 1 | 24-Hour Accessible | <input type="button" value="Edit"/> <input type="button" value="Add Door"/> |

5.5 Set Access by Level

It's an optional function to create access level and add person to created level.
Choose **Access Control > Set Access by Level > Add person** to add person to the access level.

Access Time Zones Holidays Door Access Levels Set Access By Level

Position: Access Control ->

Search Access Levels Access Time Zones

Edit Levels Personnel

Total 2 Records/1 Page

| Access Levels | Access Time Zones | Related Operation |
|---------------|--------------------|---|
| ss | 24-Hour Accessible | <input type="button" value="Add Person"/> |
| 1 | 24-Hour Accessible | <input type="button" value="Add Person"/> |

5.6 Set Access by Employee

The created access levels can be assigned to employees here.
Choose **Access Control > Set Access by Employee > Add access level** to assign access level.

Access Time Zones Holidays Door Access Levels Set Access By Level Set Access By Employee

Position: Access Control ->

Search Personnel No. First Name Department

Edit Personnel Levels

Total 386 Records/20 Page

| Personnel No. | First Name | Department | Related Operation |
|---------------|------------|------------|---|
| 000000001 | 1 | ZKTeco | <input type="button" value="Add Access Level"/> |
| 000000115 | 115 | ZKTeco | <input type="button" value="Add Access Level"/> |
| 000000116 | 116 | ZKTeco | <input type="button" value="Add Access Level"/> |
| 000000117 | 117 | ZKTeco | <input type="button" value="Add Access Level"/> |
| 000000118 | 118 | ZKTeco | <input type="button" value="Add Access Level"/> |
| 000000119 | 119 | ZKTeco | <input type="button" value="Add Access Level"/> |

5.7 Anti-Passback

The anti-passback is using in some special occasions, there it's required that the card holder who entered from a door by punching must exit from a door by punching, with the entry and exit records strictly consistent. The user can use this function just by enabling it in the settings.




5.7.1 Adding anti-passback

Choose **Access Control > Anti-Passback > Add** to add the anti-passback options or master and slave device.

5.8 Access Group

AC group defines which door or door combination can be opened in a specific time zone after users pass verification.


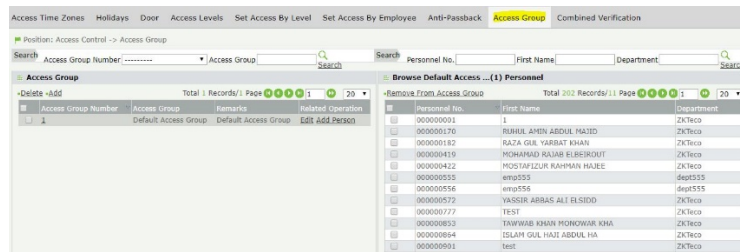


5.8.1 Adding Access Group

Choose **Access Control > Access Group > Add** to add the access group with specific verification mode & time zone.



The employees can be assigned to created access groups.

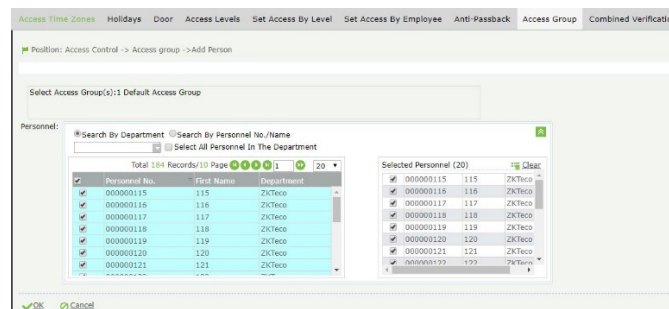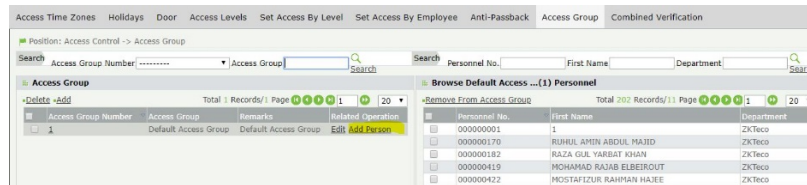

5.9 Combined Verification

Access control groups can be put into different unlock combinations to enable multiple authentication and improve access control security. It's a combination of the personnel in one or more multi-personnel groups. When setting the number of people in each group, you can configure one group (such as combined door opening by two people in one group) or multiple group.



5.9.1 Adding Combined Verification

An unlock combination can consist of a maximum of five AC groups.

Choose **Access Control > Combined Verification > Add** to assign the access group and add the employees to make combination.

The screenshot shows the 'Add' form for 'Combined Verification' in the ZKTeco software. The top navigation bar is the same as in the previous image. The 'Combined Verification' sub-tab is active. The form includes the following fields: '*Combined Verification Number:' with a dropdown menu showing '2'; '*Combined Verification Name:' with a text input field; and '*Door:' with a dropdown menu. Below these is a section titled 'Combined Verification:' containing five groups, each with two dropdown menus and a count in parentheses: 'Group 1: (0)', 'Group 2: (0)', 'Group 3: (0)', 'Group 4: (0)', and 'Group 5: (0)'. At the bottom of the form, there are three buttons: 'Save and New', 'OK', and 'Cancel'.

Chapter 6 Attendance Management

The system can exchange data with the T&A devices and collect attendance records kept in it. Primary functions implemented by the attendance system include regional user management and management of attendance parameters, shift timetables, scheduling, daily maintenance, attendance calculation, attendance reports, and attendance devices.


6.1 Attendance Parameters

As attendance systems set up by different companies vary, it is necessary to manually set attendance parameters to ensure the accuracy of the final attendance calculation.

6.1.1 Global Rule

Global rule is applicable for all the departments.

1. Set all the general attendance parameters.

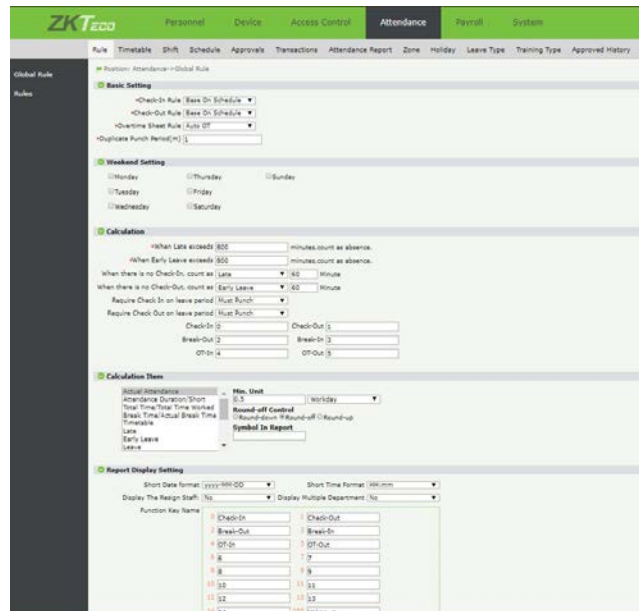

Basic setting

- **Check-In Rule:** It can be set to Based on schedule or First check in.
- **Check-Out Rule:** It can be set to Based on schedule or Last check out.
- **Overtime Sheet Rule:** It can be set to Auto OT, Not OT.
- **Duplicate Punch Period (m):** To set the time period (unit: minutes) for duplicate punches. If a value '1' (minute) is set and if a user tries to do multiple punches within 1 minute, the system will accept only the first punch.

Calculation

- The following check-in and check-out settings are valid only when mandatory check-in and check-out items are set to Yes in shift timetable settings.
- Late for over N + 1 minutes or early leave for over N + 1 minutes is counted as absence.
- On-duty without check-in entry is counted as late arrival (or absence) for N minutes.
- On-duty without check-out entry is counted as early leaving (or absence) for N minutes.

Calculation item

You can set statistical rules and symbols for normal arrival time/actual arrival time, late arrive, early leave, leave, absence, overtime, short, break in/out, no check-in and no check-out on this interface.

Min. Unit: N minutes/hours/days

Round-off Control

- **Round-down:** Omit the decimal part smaller than the minimum unit.

- **Round-off:** Count a minimum unit if the decimal part reaches half of the minimum unit.
- **Round-up:** Count a minimum unit if the decimal part is smaller than the minimum unit.

Note: Use minutes as the minimum unit when calculating the absence time.

Report Display Setting

Users can set the date and time format to be displayed in report.

- **Function Key Name:** You can set the function key status.
- **Sign in report:** Users can set symbols of normal arrival time/actual arrival time, late arrival, and early leaving in the report as needed.

2. After completion of the setting, click **OK** for saving.

6.1.2 Rules

Rules can be added for separate departments.

1. Click **Attendance > Rule > Rules > Add** to add a rule based on department.

6.2 Shift Timetable

Set the time periods that may be used during attendance and set various parameters. The timetable is the minimum unit in personnel attendance time settings. For example: These settings include work start/end time, allowed late arrival/ early leaving duration, whether check-in/check-out is mandatory, allowed time period for check-in/out, rest time, and overtime.

Before scheduling the shift, you must set all shift timetables possibly used. Only in this way can various parameters set be valid. Choose **Attendance > Timetable** to access the Timetable interface:

The system will set a default shift with the name of Flexible Timetable.

Flexible Timetable: Work delay is not counted as overtime, and late arrival, early leaving or absence is not calculated. The attendance for a flexible time period is calculated by the even number of card-punching times. The line numbers of its report are generated automatically. If four records exist, the daily report on that day has two lines. If six records exist, the daily report has three lines. Besides, the attendance time in a time period is check-out time minus check-in time.

6.2.1 Adding a Normal Timetable

1. Click **Attendance > Timetable > Add** on the Timetable interface to access the add interface.

Set the parameters as required based on the following steps:

- **Timetable Name:** Enter any characters with 20 characters at most.
- **Check-In Start Time/ End Time, Check-Out Start Time/ End Time:** Valid range for checking in/out in this time period. Check-in/out records out of this range are invalid. The start check-out time cannot overlap the end check-out time.
- **Check-in, Check-out:** Set the check-in time and checkout time.
- **Necessary Check-In, Necessary Check-out:** Decide whether check-in and check-out are mandatory in the selected time range. If an employee needs to check in/out, select Yes otherwise, select No.

- **Late Arrival, Early Out:** This refers to the permissible time for late arrival/early leave before the designation of late arrival/early leave starts during the specified working time.
- **Work Time (minute):** Total Work Time can be defined here.
- **Duplicate Punch Period (m):** It can be set either based on rule or can be user defined.

*For example, if Allowed late minute is set to 5 and check-in time is set to 9:00; Employee A checked in at 9:03 and Employee B checked in at 9:05, we can conclude that Employee A is not late as the interval between his or her check-in time and check-in start time is less than 5 minutes and Employee B is late for 6 minutes as the interval between his or her check-in time and check-in start time exceeds 5 minutes.

- **Workday:** It refers to how many workdays are calculated for each shift. If a value is set for it, the workday will be calculated according to the preset value. Otherwise, the workday will be calculated according to settings in the attendance rules.
- **Auto OT(check-out delay):** When overtime is calculated, if select Yes for Count delayed time as overtime, the overtime is the delayed time (the difference between check-out time and check-out end time) + the fixed overtime (minutes) during this timetable. The value is 0 if No is selected for Count delayed time as overtime. Auto OT(check-in early): It will count the time delayed between check in start time & check in time.

Position: Attendance -> Timetable -> Add

1. Necessary Check-In/Check-Out: When "No" is selected in here, the system will automatically create corresponding random check-in/check-out logs.
2. If there is a shift (regular or temporary) in a timetable, the timetable cannot be edited or deleted.

*Timetable Name: *Type: Normal Timetable

*Check-In Start Time: 09:00:00 *Check-Out Start Time: 17:00:00

*Check-In: 09:00:00 *Check-Out: 18:00:00

*Check-In End Time: 10:00:00 *Check-Out End Time: 19:00:00

Break Time: Add

| No. | Name | Start time | End time | break time | Type | Related Operation |
|-----|-------------|------------|----------|------------|-----------|-------------------|
| 1 | Lunch Break | 11:00 | 16:00 | 60 | MustPunch | Edit Delete |

*Necessary Check-In: Yes *Necessary Check-Out: Yes

*Late Arrival: 0 *Early Out: 0

*Auto OT(Check-In Early): No *Min minutes of OT(Check-In Early): 0

*Auto OT(Check-Out Delay): No *Min minutes of OT(Check-Out Delay): 0

*Multiple In & Out: No *Duplicate Punch Period(m): Base On Rule

*Workday: 1.0 *Work Time (minute): Timetable Duration

*Base On Punch Type: No

Save and New OK Cancel

2. After the completion of the settings, click **OK** to save the settings and return to the Timetable interface. The timetable list displays the added timetable.

Notes:

1. The interval between check-in start time and check-out end time is not allowed to exceed the maximum/minimum timetable length set in the system. Please refer to Chapter 6.1 Attendance Parameters for further information.
2. There is no timetable with the same start time and end time.
3. Please refer to "Time Selection" in Appendix 1 for time setting.

6.2.2 Adding a Flexible Timetable

1. Click **Add** on the Timetable interface to access the Add interface & change type to Flexible Timetable.

Position: Attendance -> Timetable -> Add

1. Necessary Check-In/Check-Out: When "No" is selected in here, the system will automatically create corresponding random check-in/check-out logs.
2. If there is a shift (regular or temporary) in a timetable, the timetable cannot be edited or deleted.

*Timetable Name: *Type: Flexible Timetable

*Necessary Check-In: Yes *Necessary Check-Out: Yes

*Change At: 00:00:00 *Work Type: Normal Work

*Multiple In & Out: No *Duplicate Punch Period(m): Base On Rule

*Workday: 1.0 *Work Time (minute): Timetable Duration

*Auto OT: No *Min minutes of OT: 0

*Base On Punch Type: No

Save and New OK Cancel

- **Timetable Name:** Enter any characters with 20 characters at most.
- **Change At:** This is the day extending time using for cross day shift.
- **Work Time:** Total work time can be defined here.
- **Only consider first and last punch:** If No is selected, it will consider all the punches or it will consider only first and last punch.
- **Auto OT:** Automatic overtime calculation on timetable. If Yes is selected, you can define N time so N+1 time will be calculated as Overtime.
- **Duplicate Punch Period (m):** It can be set either based on rule or can be user defined.
- **Work Type:** To define the flexible timetable for work types such as Normal, Day Off and Weekend.
- **Base on Punch Type:** To define whether to use function keys or not.


2. After the completion of the settings, click **OK** to save the settings and return to the Timetable interface. The timetable list displays the added timetable.

1. Click the Timetable Name or the corresponding **Edit** under Related Operation to access the timetable edit interface.
2. Modify relevant settings as needed. The detailed modification method is the same as the operation of adding a timetable. Click **OK** for saving after completing the modification.

1. Select a timetable, click **Delete** on the upper left of the timetable list or directly click **Delete** under Related Operation to access the timetable deletion confirmation interface.
2. Click **OK** to delete this timetable and return to the Timetable interface.

6.3 Shift Management

Choose **Attendance** > **Shift** to access the shift management main interface that displays the search field and shift time table details. With the search function, you can easily query shifts. All shifts in the current system are displayed in the list. Click the line where the shift is and the timetable details list on the right will display the timetable details of this shift in a chart.

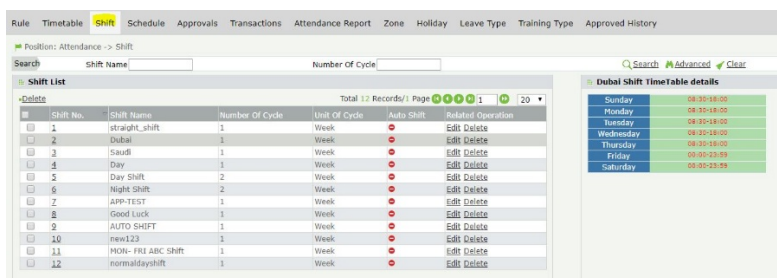

The flexible shift is a default attendance shift in the system and is a cycle of the flexible timetable within a week. If an employee works in a flexible schedule and attendance checking is required, a flexible shift can be arranged. If an employee has a punching record without a shift arranged, the attendance is calculated based on flexible shifts and classified as some overtime such as overtime on days off or on holidays.

ZKTeco Middle East
www.zkteco.me

6.3.1 Adding a Shift

1. Click **Add** on the Shift interface to access the shift addition interface:

Set the parameters as required based on the following steps:

- **Shift Name:** Enter any characters, with 30 characters at most. A shift name must be unique.
- **Unit of Cycle:** including day, week, and month.
- **Number of Cycle:** Shift cycle period = Number of cycles * Unit of cycle.
- **Count weekend as:** The weekend work can be forwarded to normal work/weekend OT/holiday OT.

Note: The system displays optional dates in the Select Date box based on the values of Unit of Cycle and Number of Cycle.

- **Select Timetable:** Select timetable for the shift. It needs to be preset in the Timetable. Please refer to Chapter 6.2 “Shift Timetable” for the detailed operation method.

2. After the completion of the settings, click **OK** to save the settings and return to the Shift interface. The shift list displays the added shift details.

Note: A shift refers to the circulation of a timetable chosen by the users in the cycle period set by the user. Dates unselected represent rest days. When scheduling shifts for an employee, a user needs to select only the start date, end date, and the shift used and it is unnecessary to indicate the date which an employee should work or take a vacation. After a shift is selected, the system will automatically determine the dates on which an employee should work or take a vacation according to the cycle settings of the selected shift.

6.3.2 Maintaining a Shift

Adding a Timetable

Select a shift, click **Add Timetable** to access the edit interface. After completing the edit, click **OK** to save the settings and exit. A timetable is added to this shift.

Note: This function is applicable to an irregular timetable.

For example, in a company, the (attendance) timetable on Monday, Wednesday, and Friday is 8:00 to 12:00, and the (attendance) timetable on Tuesday and Thursday is 9:00 to 18:00. This result can be realized by the following operations:

1. Click **Add** on the Shift interface to access the shift adding interface and perform settings, as shown in the following figure.

- Enter a shift name in Shift Name.
 - As this company schedules shifts by week and the work schedule for every week is identical, set Unit of Cycle to Week and Number of Cycle to 1.
 - As this company adopts 8:00 to 12:00 as its timetable on Monday, Wednesday, and Friday, select the timetable 8 to 12 (8:00 to 12:00) in the Select Timetable box and select Monday, Wednesday, and Friday in the Select Date box.
 - Select the Weekend as Normal working hours or Normal OT or Weekend OT.
- After completion of the settings, click **OK** to save the settings and return to the Shift interface. The shift list displays the shift details. Click the line where this shift is to check the shift timetable details, as shown in the following figure.

| Shift No. | Shift Name | Number Of Cycle | Unit Of Cycle | Auto Shift | Related Operation |
|-----------|--------------------|-----------------|---------------|------------|-------------------|
| 1 | straight_shift | 1 | Week | | Edit Delete |
| 2 | Dubai | 1 | Week | | Edit Delete |
| 3 | Saudi | 1 | Week | | Edit Delete |
| 4 | Day | 1 | Week | | Edit Delete |
| 5 | Day Shift | 2 | Week | | Edit Delete |
| 6 | Night Shift | 2 | Week | | Edit Delete |
| 7 | APP-TEST | 1 | Week | | Edit Delete |
| 8 | Good Luck | 1 | Week | | Edit Delete |
| 9 | AUTO SHIFT | 1 | Week | | Edit Delete |
| 10 | new123 | 1 | Week | | Edit Delete |
| 11 | MON- FRI ABC Shift | 1 | Week | | Edit Delete |
| 12 | normaldayshift | 1 | Week | | Edit Delete |
| 13 | DubaiWork | 1 | Week | | Edit Delete |

- In the shift list, select the shift in which a timetable needs to be added, and then click **Add Timetable** on the upper left of the shift list to access the interface of adding a timetable to the shift and perform settings. As this company adopts 9:00 to 18:00 as its (attendance) timetable on Tuesday and Thursday, select the timetable 9 to 18 (9:00 to 18:00) in the Select Timetable box and select Tuesday and Thursday in the Select Date box.
- After the completion of the settings, click **OK** to save the settings and return to the Shift interface. The shift list displays the shift details with the added timetable. Click the line where this shift is to check the shift timetable details.

Clearing a Timetable

In the shift list, click the check box before a shift name (this operation is applicable only to a single shift and cannot be performed in batches), click **Clear Timetable** to access the timetable clearance interface, and click **OK** to confirm and delete the timetable from the shift selected.

Deleting a Shift

In the shift list, click the check box before a shift name (this operation is applicable only to a single shift and cannot be performed in batches), click **Delete** or directly click **Delete** under Related Operation to access the deletion confirmation interface, and click **OK** to delete the shift selected and exit.

6.4 Staff Scheduling

You can arrange shifts for employees after setting the attendance timetables and shifts. If you fail to schedule shifts for employees, overtime will be calculated according to flexible shifts.

6.4.1 Personnel Scheduling

On the Schedule interface, users can schedule shifts for personnel by adding schedules or adding temporary schedules.

Adding a Schedule

1. Click **Attendance > Schedule > Schedule** on the Schedule interface to access the schedule addition interface.

The following describes the specific setting method.

- **Personnel:** Select personnel for whom shifts need to be scheduled. Multiple choices are allowed. (Refer to “Personnel Selection” in Appendix 1 for personnel selection.)
- **Start Date, End Date:** Set the start date and end date for shift scheduling. Please refer to “Date Selection” in Appendix 1 for data selection.
- **Shift Name:** Enter the Shift Name.
- **Unit of Cycle:** Select the type (day/week/month) in order to add cyclic schedules.
- **Number of Cycle:** Enter the number of cycles, which has to be repeated for the selected Unit.
- **Timetable:** Select the timetable from the Timetable list and set timetable for weekdays and weekend separately.
- **Replace existing shift even using:** User can use this function, if previously set shift/existing shift has to be replaced.
- **Remove overlap schedule:** User can use this function, in order to remove overlapping schedule
- **Count Day Off as:** Normal Work/Normal OT/Weekend OT as per the organization policies
- **Count Weekend as:** Normal Work/Normal OT/Weekend OT as per the organization policies.
- **Auto Shift:** This is to control multiple timing for employee.

If you enable this and assign more than one timing per day then report will take appropriate timing depend on employees punch.

Note: By default, the start date and end date are set to the first day of this month and the first day of next month respectively.

- **Selected Shift:** Select a shift in Shift List, and click to move this shift to Selected Shift.


2. After completing settings, click **OK** to save the settings and return to the Schedule interface.

Note: Only one shift can be selected for employee shift scheduling. Only the last settings are saved when date ranges are identical during multiple shift scheduling.

Adding a Temporary Schedule

Temporary schedule is complementary to the existing schedule. If employees in a shift need to overtime temporarily, it is necessary to arrange one (or more) timetable(s) for overtime temporarily. Generally, temporary schedules are shift scheduling for overtime, for example overtime at night, on weekends, or on holidays and festivals.

1. Click **Temp (Temporary) Schedule** on the Schedule interface to access the Add temporary schedule interface.

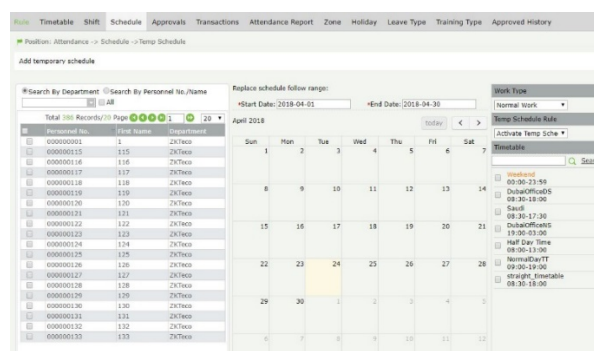

The following describes the specific setting method.

- **Personnel:** Select personnel needing temporary schedules. (Multiple choices are allowed). Please refer to “Personnel Selection” in Appendix 1 for personnel selection.
- **Start Date, End Date:** Set the start date and end date for a temporary schedule. Please refer to “Date Selection” in Appendix 1 for data selection.
- **Timetable:** Select a timetable used by a temporary schedule. (Multiple choices are allowed.) Please refer to Chapter 6.2 “Shift Timetable” for timetable setting.
- **Date:** Click to select the date for temporary schedule. (Multiple choices are allowed.)
- **Had schedule in current day:** Select Only temporary scheduling is effective or Add after the existing scheduling when arranging shifts for employees working in the company in the current day.
 - ***Only temporary scheduling is effective:** Whether an employee is scheduled a shift, only temporary scheduling is effective when work attendance is checked.
 - ***Add after the existing scheduling:** is complementary to schedule for employees. The attendance data includes shift arrangement and temporary shift arrangement. It will be displayed with two shift assignment records in calculation.
- **Specify work type:** Specify work type for the temporary schedule. The options include Normal Work, Overtime on Week Days, Overtime on Rest Days (overtime on weekends) or Overtime on holidays. The late arrival, early leaving, leave, and absence will not be recorded when the work type is set to Overtime on Rest Days or Overtime on holidays or festivals.

Note: Multiple timetables can be selected for temporary schedule, but the start time of timetables should not be the same. The timetables selected can be applicable to all dates selected.

2. After completing settings, click **OK** to save the settings and return to the Schedule interface.

6.4.2 Querying Schedule Details

Querying a Schedule List

1. Choose **Attendance > Schedule** to access the Schedule interface. The interface displays personnel schedule records in a list by default.
2. Click the drop-down box next to Select Personnel, select an employee whose schedule records need to be queried (refer to “Personnel Selection” in Appendix 1 for personnel selection), and click **Search Schedule** to view the schedule records of employee. In Personnel Schedule Table, click the line where the schedule records are to view the schedule timetable details in Schedule Shift Timetable details on the right of the interface.

Querying a Temporary Schedule List

1. Choose **Attendance > Scheduling** to access the Schedule interface.
2. Click the drop-down box next to Select Personnel, select an employee whose schedule records need to be queried (refer to “Personnel Selection” in Appendix 1 for personnel selection.), and click **Search Temporary Schedule**. Then Temporary Schedule Table displays temporary schedule records of the employee.

Note: No shift timetable details are displayed in Temporary Schedule Table. If no employee is selected, the temporary schedule records of all employees will be displayed.

6.4.3 Clearing Schedule Records

In this system, users can delete schedule records selected and can click **Delete Schedule Records** on the Schedule interface to clear all schedule records, including temporary schedule records.


Deleting a single schedule record or multiple schedule records at a time

1. Select a schedule record to be deleted in Personnel Schedule List. (Multiple choices are allowed) When there are a large number of schedule records, you can accurately screen the schedule records of an employee by searching for the employee's schedules. Refer to Chapter "6.4.2 "Querying Schedule Details" above for the search method.
2. After selecting a schedule record, click **Delete Schedule Records** to access the schedule records deletion confirmation interface.
3. Click **OK** to delete the schedule record selected.

Note: All temporary schedule records in the system will be displayed when you click Search Temporary Schedule. You can screen the schedule records by entering an employee number in the search box so that the temporary schedule records to be deleted are accurately displayed.

Emptying all schedule records at a time

1. Empty schedule records
 - A. Click **Empty** on the Schedule interface to access the schedule records clearance confirmation interface.

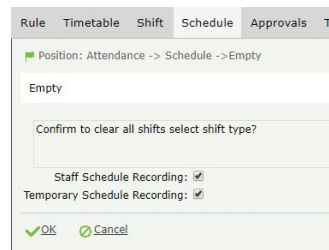


- B. Click **OK** to confirm and empty all schedule records, including temporary schedule records.

6.5 Attendance on Holidays

Attendance time on holidays and festivals may be different from that on week days. To simplify operation procedures, the system offers settings designed for attendance time and rules on holidays and festivals.

6.5.1 Adding a Holiday for Attendance

Choose **Attendance > Holiday > Add** to access the holiday addition interface.

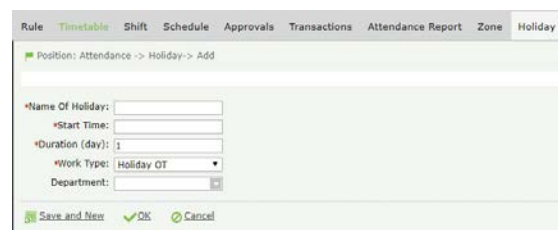

6.5.2 Editing a Holiday for Attendance

In the holiday list, click the name of a holiday, or click **Edit** under Related Operation to access the edit interface. Modify parameters as needed and click **OK** to save the modifications.

6.5.3 Deleting a Holiday for Attendance

In the holiday list, select the holiday to be deleted, and then click **Delete** on the upper left of the holiday list, or directly click the **Delete** under Related Operation in the line of the holiday to be deleted to access the deletion confirmation interface. Click **OK** to delete the holiday and return to the Holiday interface.


6.6 Attendance Approvals

Daily maintenance includes viewing the AC logs and performing various operations on leave, overtime and appended logs.

6.6.1 Leave

Leave Type Management

Choose **Attendance > Leave Type** to access the Leave Type interface.

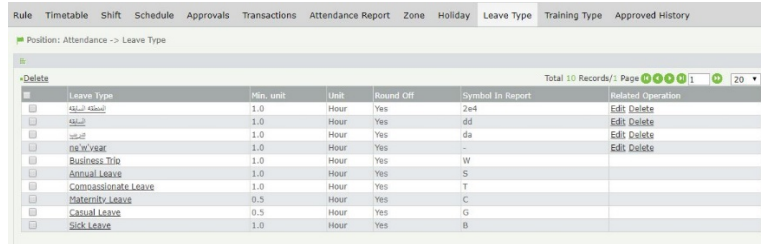


The screenshot shows the 'Leave Type' management interface. At the top, there is a navigation bar with tabs: Rule, Timetable, Shift, Schedule, Approvals, Transactions, Attendance Report, Zone, Holiday, Leave Type, Training Type, and Approved History. Below the navigation bar, the breadcrumb path is 'Position: Attendance -> Leave Type'. The main area displays a table of leave types with columns: Leave Type, Min. unit, Unit, Round Off, Symbol In Report, and Related Operation. The table contains the following data:

| Leave Type | Min. unit | Unit | Round Off | Symbol In Report | Related Operation |
|---------------------|-----------|------|-----------|------------------|-------------------|
| Annual Leave | 1.0 | Hour | Yes | 2a4 | Edit Delete |
| Business Trip | 1.0 | Hour | Yes | da | Edit Delete |
| Compassionate Leave | 1.0 | Hour | Yes | - | Edit Delete |
| Maternity Leave | 0.5 | Hour | Yes | C | |
| Casual Leave | 0.5 | Hour | Yes | G | |
| Sick Leave | 1.0 | Hour | Yes | B | |

Employees will request a leave and superuser will review and approve/reject the leave which will be displayed in the system statistics. In this case, leave type should be selected when entering a leave record. The superuser can also add leave on the behalf of the employee for some cases. There are six default leave types in the system: sick leave, casual leave, maternal leave, compassionate leave, annual leave and business trip.

Add a leave type. (Note: The new leave type has the same function as the default leave types of the system.)

1. Click **Add** on the Leave Type interface to access the leave type addition interface.

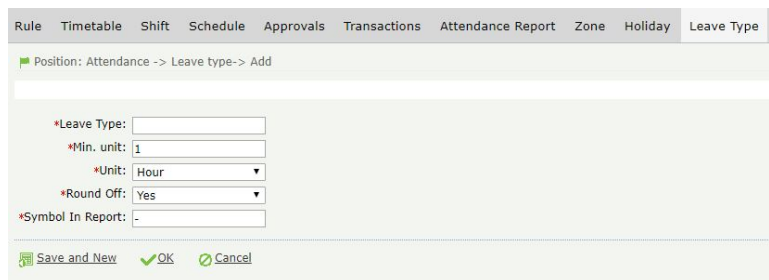

The screenshot shows the 'Leave Type Addition' interface. It has a navigation bar with tabs: Rule, Timetable, Shift, Schedule, Approvals, Transactions, Attendance Report, Zone, Holiday, Leave Type, and Training Type. The breadcrumb path is 'Position: Attendance -> Leave type -> Add'. The form contains the following fields:

- *Leave Type: [Text input field]
- *Min. unit: [Text input field with value 1]
- *Unit: [Dropdown menu with 'Hour' selected]
- *Round Off: [Dropdown menu with 'Yes' selected]
- *Symbol In Report: [Text input field with value -]

At the bottom, there are three buttons: 'Save and New', 'OK', and 'Cancel'.

Set the parameters as required based on the following steps:

- **Name of Leave:** Enter the name of a leave type, with 20 characters at most.
 - **Min. unit and Unit:** Set the measurement unit and minimum value of the leave type. Unit can be set to Hour, Minute or Workday.
 - **Round Off:** Set whether the values are rounded off.
 - **Symbol In Report:** Set the symbol of the leave type in the attendance report.
2. After the completion of the setting, click **OK** to save the settings and return to the Leave Type interface. The leave type list will display the new leave type.

Leave management

For different leave cases, an operator needs to enter the leave information manually, and the system collects the final attendance statistics based on the entered leave information.

❖ Adding a leave record

1. Choose **Attendance > Approvals > Leave** to access the Leave interface.
2. Click **Add** on the Leave interface to access the Add Leave interface.

❖ Revoke

This function is used to revoke the approved or rejected leave records.

1. Select the approved or rejected records and click **Revoke**.

| Personnel No. | First Name | Start Time | End Time | Reason | Leave Type | Apply Time | Approve Status | Approver | Remarks | Approved Time | Related Operation |
|---------------|------------|------------------|------------------|---------------------|------------|---------------------|----------------|----------|--------------|---------------------|-------------------|
| 00000222 | Rinku | 2018-03-07 02:47 | 2018-03-07 23:47 | Sick Leave | | 2018-03-28 12:47:49 | Approved | admin | | 2018-03-28 12:47:49 | Edit Delete |
| 00000282 | SHILPA | 2018-03-28 00:00 | 2018-03-28 23:59 | Casual Leave | | 2018-03-27 21:59:19 | Rejected | Shilpa | unacceptable | 2018-03-27 21:48:35 | Edit Delete |
| 00000282 | SHILPA | 2018-04-01 00:00 | 2018-04-03 23:59 | Annual Leave | | 2018-03-25 12:51:30 | Apply | Shilpa | | | Edit Delete |
| 00000200 | Rosemof | 2018-02-28 12:50 | 2018-03-01 12:50 | Sick Leave | | 2018-03-25 12:51:17 | Apply | | | | Edit Delete |
| 00001200 | | 2018-03-24 12:14 | 2018-03-25 12:14 | Compassionate Leave | | 2018-03-25 12:14:51 | Apply | | | | Edit Delete |

2. Click **OK** to confirm and the Approve Status will be changed to "Revoked".

| Personnel No. | First Name | Start Time | End Time | Reason | Leave Type | Apply Time | Approve Status | Approver | Remarks | Approved Time | Related Operation |
|---------------|------------|------------------|------------------|---------------------|------------|---------------------|----------------|---------------|---------|---------------------|-------------------|
| 00000222 | Rinku | 2018-03-07 02:47 | 2018-03-07 23:47 | Sick Leave | | 2018-03-28 12:47:49 | Revoked | admin->admin | | 2018-04-24 17:46:06 | Edit Delete |
| 00000282 | SHILPA | 2018-03-28 00:00 | 2018-03-28 23:59 | Casual Leave | | 2018-03-27 21:59:19 | Rejected | Shilpa->admin | | 2018-04-24 17:46:11 | Edit Delete |
| 00000282 | SHILPA | 2018-04-01 00:00 | 2018-04-03 23:59 | Annual Leave | | 2018-03-25 12:51:30 | Apply | Shilpa | | | Edit Delete |
| 00000200 | Rosemof | 2018-02-28 12:50 | 2018-03-01 12:50 | Sick Leave | | 2018-03-25 12:51:17 | Apply | | | | Edit Delete |
| 00001200 | | 2018-03-24 12:14 | 2018-03-25 12:14 | Compassionate Leave | | 2018-03-25 12:14:51 | Apply | | | | Edit Delete |

6.6.2 Manual Punch

When an employee leaves on business trip or forgets to punch in or out, entering an attendance record to the attendance report manually is called adding a manual punch. The manual punches are generally entered by the management personnel based on the attendance result and the attendance system of the enterprise after an attendance cycle ends.

Adding a Manual Punch

1. Choose **Attendance > Approvals > Manual Punch > Add** to access the Manual Punch interface.
2. Select employees. The list on the right displays the selected employees. Set Punch Time, Status (check-in, check-out, break out, break in, overtime in, overtime out, others) and Reason for applying Punching data.
3. After the completion of the setting, click **OK** to save the settings and return to the Manual Punch Log interface. The list of manual punches will display the new manual punches.

Note: Adding a manual punch will simultaneously add an identical entry in the transaction log table, and modifying it will simultaneously modify the same entry in the transaction log table. The manual punches added by the system administrator require no further approval.

Deleting a manual punch

The method for deleting an appended log is same as that for deleting a leave.

Approving a manual punch

The method for approving an appended log is same as that for approving a leave.

Revoke

This method for revoking an appended log is same as that for revoking a leave.

6.6.3 Overtime

Overtime details can be entered in two ways. Through admin login, admin can add overtime for each personnel (which will be auto approved) and through employee login, employees can apply for overtime (which will be approved by the Approver).

Adding an Overtime

1. Choose **Attendance > Approvals > Overtime > Add** to access the Add Overtime interface.
2. Select employees. The list on the right displays the selected employees. Select Start Time, End Time, OT Type (Normal OT/Weekend OT/Holiday OT) and Overtime description.
3. After the completion of the setting, click **OK** to save the settings and return to the Add Overtime interface. The list of overtime will display in the Overtime grid.

Note: Adding an overtime log will simultaneously add an identical entry in the transaction log table, and modifying it will simultaneously modify the same entry in the transaction log table. The overtime logs added by the system administrator require no further approval.

Deleting an Overtime Log

The method for deleting an overtime log is same as that for deleting a leave and manual punch.


Approving an Overtime log

The method for approving an overtime is same as that for approving a leave and manual punch.

6.7 Transaction

A Transaction Log Table displays the attendance records of all employees, including those uploaded by the T&A device.

Choose **Attendance > Transactions** to access the Transaction interface, and the main interface lists the attendance records of all employees by default.

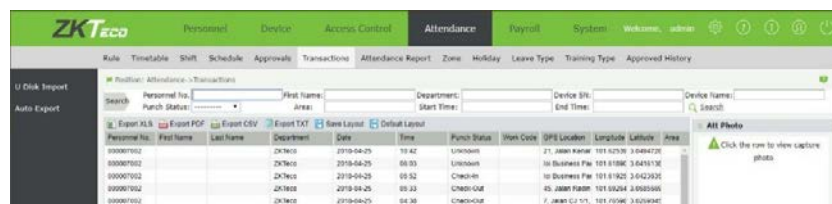


1. Users can export a Transaction Log table to an XLS, PDF, or CSV file based on requirements. Please refer to "Export" in Appendix 1. Export for the specific method of exporting the transaction log table.
2. Users can select the fields to be displayed in the transaction log table based on requirements (the fields are displayed after being checked).
3. Users can change the column width by dragging the column border to the left or right.
4. Users can define the number of records to be displayed on each interface in the transaction log table.
5. Click the line where an attendance record is located, and view the corresponding photo in the Att Photo box on the right.

6.7.1 U Disk Import


Import the attendance records downloaded from a device to the USB disk to the attendance history system.

1. Click **Attendance > Transactions > U Disk Import**.
2. Once you've clicked the U Disk Import, a pop-up box will appear and input the device serial number in Device SN box.
3. Click **Choose File**, and select an attendance record file to be uploaded.
4. After completion of the setting, click **OK** to upload the attendance records in the attendance record file to the selected device.

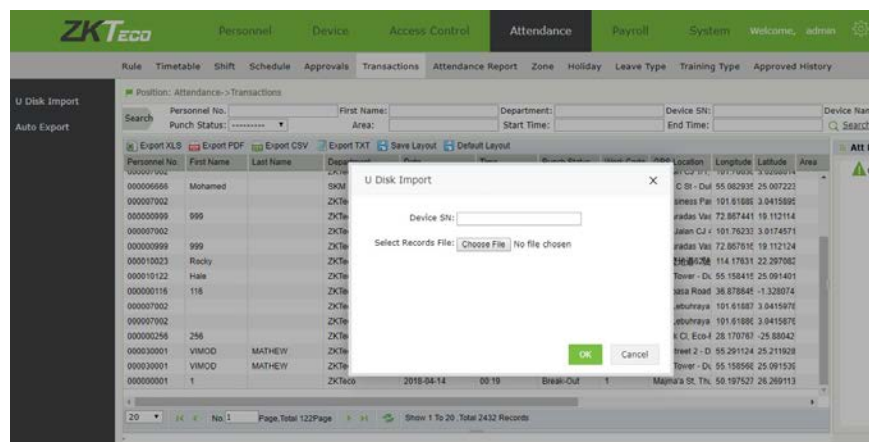

6.7.2 Auto Export

The transaction file can be exported for integration purpose.

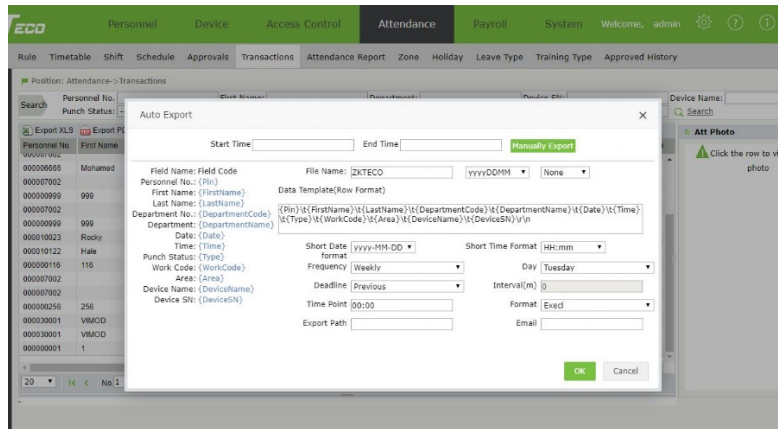

6.8 Attendance Report

6.8.1 Attendance Statistics

Rules for selecting the check-in/out time

The check-in time should select the time that is earlier than and closest to the due check-in time. For example, when you check in at 8:55 and 9:01, it is considered that you check in at 8:55. The check-out time should select the time that is later than and closest to the due check-out time. For example, the due check-out time is 18:00, if you check out at 18:01 and 18:20, it is taken that you check out at 18:01.

Calculation process

First determine the shift of each employee on a day, then determine the work type on that day, then select the check in/ out time and the leave list; then select the compensatory leave information. When selecting the work type, only the holiday settings of 100 days prior to the current day can be selected. Select the attendance parameters, calculate the attendance results, and save the results to the database.

Calculation prerequisites

The attendance calculation date should be later than the entry date and calculation is only made when Enable Attendance Function is set to Yes. If attendance check is not required for an employee, no attendance data of the employee will be displayed in the attendance calculation.

Work type judgment rules

If there is no schedule or temporary schedule, the system considers the day as a rest day, and calculate the attendance of the current day using the flexible shift. If Auto OT is selected, the overtime is calculated based on the settings of the attendance parameters, and the calculation result is rounded based on the rounding rules. If the work time of the timetable is set to zero, it is considered that the timetable is overtime, which will be calculated as the daily overtime.

Rounding rules

The rounding rules include rounding down, rounding off and rounding up:

- For rounding down, when the remainder of the value of a calculated item exceeds the minimum unit, the system automatically truncates the remainder.
- For rounding off, when the remainder of the value of a calculated item exceeds half of the minimum unit, the value will be increased by a minimum unit; if the remainder of the value of a calculated item is less than half of the minimum unit, the remainder will be directly abandoned.
- For rounding up, if the remainder of the value of a calculated item exceeds the minimum unit, the value will be increased by a minimum unit.

Scheduling principle


1. When there is a normal schedule, the system considers the day as a workday. However, if there is a temporary schedule, the timetable of the additional temporary schedule will be considered as the normal working hours by the system.
2. If there is no existing schedule or temporary schedule, the system considers the day as a rest day. The system will not calculate the attendance for employees who come to work.
3. If there is no existing schedule but a temporary schedule is arranged, the temporary schedule will be considered as the normal working hours.
4. Determining whether there is existing scheduling first:
 - A. Calculate the attendance based on a schedule if any, and check whether there is a temporary schedule. If yes, check whether Only temporary scheduling is effective or Add after the existing scheduling is selected for calculating the attendance. The work type of the temporary schedule can be designated during temporary scheduling.
 - B. If there is no schedule, check whether there is a temporary schedule.
 - C. If there is no schedule or temporary schedule, the attendance is not calculated.
5. The attendance is not calculated when there is no schedule.

6.8.2 Attendance Report

The attendance report lists the daily attendance information of the queried personnel within a designated time period, and collects statistics on absence, late arrival/early leave, overtime and leave, to check whether the listed information is consistent with the actual conditions. If the obtained result is inconsistent, adjust the shift, add an overtime sheet or compensatory leave sheet or directly modify the data in the report based on the requirements.

Choose **Attendance > Attendance Report** to access the Attendance Report interface.

The following describes how to view an attendance report.

1. Click  under Select Personnel, and select an employee whose attendance report information needs to be viewed from the popped up personnel drop-down list. You can select multiple employees or all employees.
2. Set Start Date and End Date. Please refer to "Date Selection" in Appendix 1 for the method of setting the date.
3. Click **Search** and view the attendance report information of the selected employees between the set start date and the end date.

Note: When you click a report name, the corresponding report information is displayed.

Scheduled report

The scheduled report includes the attendance data based on schedule and there is two formats during export with break and without break. Also the report will display multiple entries.

- Users can export an attendance report to an XLS, PDF, or CSV file based on requirements. Please refer to "Export" in Appendix 1 for the specific method of exporting the report.
- Users can select the fields required for displaying in the attendance report based on requirements (the fields are displayed after being checked).
- Users can change the column width by dragging the column border to the left or right based on requirements.

Daily attendance report

The daily attendance interface displays the daily attendance status, attendance statistics, over time statistics, leave records, and leave summary within a designated period, and uses symbols or digits or the combination of symbols and digits to represent different items. The meanings of the symbols in each report can be changeable in Daily Attendance.

Total Timecard

The total timecard interface displays the statistics on the schedule, attendance status, overtime and holidays of all staff by date. The attendance list is a statistical table of attendance records in each shift timetable.

- Total time: interval between the check-in time and the check-out time.
- Attendance Duration: timetable time (late + early + break)
- Total time worked: attendance duration + OT
- Exception: all abnormalities other than on-duty and off-duty, such as leave.
- Timetable: valid duration of actual attendance in Work Time (Minute) of a timetable.

- Short: timetable – worktime.

Attendance Summary

The attendance summary interface displays the attendance summary of each employee in the time period, including the lists of attendance, leaves and overtime, namely the summary table of the attendance lists.

The leave records are calculated by the leave type. The data in the leave column is the sum of the data of all leave types.

For example, leave = sick leave + casual leave + maternity leave + compassionate leave + annual leave + self-defined leave.

Leave Summary

The leave summary interface displays all valid time and leave types of all valid leave records in the selected date range. Valid time (minutes) means the minutes between the start time and end time of a leave record.

First In Last Out

It provides statistics on the earliest and latest punching data among the punching data of each employee for each day.

Exception

It provides all attendance exceptions.

Summary Sector

It provides all the data of an employee in a particular department. It is like a statistic of all employees in a department.

Time Card

It provides the detailed punching information of the selected personnel.

6.9 Zone User Management

Click **Attendance > Zone** to access the Zone User Management interface.

The screenshot shows the 'Zone' tab selected in the top navigation bar. On the left, there is a tree view under 'Area' with 'test' selected. The main area displays a table of personnel assigned to this area.

| Personnel No. | First Name | Card No. | Department No. | Department | Position No. | Gender | Privilege | Area | Fingerprint | Face | Finger Vein | Palm |
|---------------|------------|----------|----------------|------------|--------------|--------|-----------|--------|-------------|------|-------------|------|
| 000000001 | 1 | 1 | | ZKTeco | | | Employee | test | Ver 10:1 | None | None | None |
| 000000115 | 115 | 1 | | ZKTeco | | | Employee | ZKTeco | None | None | None | None |
| 000000116 | 116 | 1 | | ZKTeco | | | Employee | ZKTeco | None | None | None | None |
| 000000117 | 117 | 1 | | ZKTeco | | | Employee | ZKTeco | None | None | None | None |
| 000000118 | 118 | 1 | | ZKTeco | | | Employee | ZKTeco | None | None | None | None |
| 000000119 | 119 | 1 | | ZKTeco | | | Employee | ZKTeco | None | None | None | None |
| 000000120 | 120 | 1 | | ZKTeco | | | Employee | ZKTeco | None | None | None | None |

Users can add personnel to an area on the interface. Select an area from the area list on the left, and the system automatically screens and displays the personnel of the area in the list on the right.

The steps for adding an employee to an area are as follows:

1. Click **Add Personnel** to access the personnel addition interface.
2. Select areas and employees (multiple choices are allowed).
3. Click **OK** to save the settings, and return to the Zone User Management interface.
4. On the Zone User Management interface, click the selected area, and the area personnel list on the right displays the information of the employees.


Note: After employees are added, the employees are set to be in the selected attendance area, the employee information is issued to all devices in the attendance area, and the employee information in all devices in the original attendance area is deleted.

Chapter 7 Payroll Function

7.1 Basic Setting

7.1.1 Formula Sign

Click **Payroll > Basic Setting > Formula Sign** to go to formula sign interface. The basic salary, work data, workhours & daily salary can be defined as symbols for future formula generation.

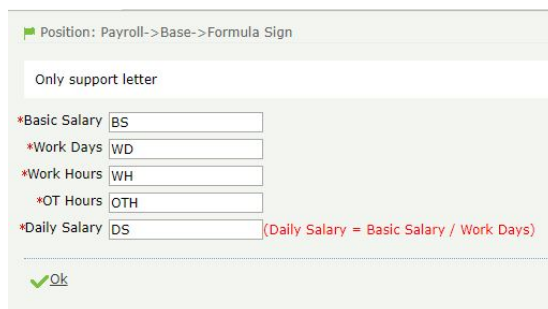

7.1.2 Currency

In this interface, you can add the currency using for payroll calculation. Operations like add, delete, log, and export options are available. You can also set one of the currency as basic currency.

Click **Payroll > Basic Setting > Currency** to go to currency interface.

7.1.3 Allowance Type

In this interface, you can define the allowance types such as: transportation allowance, food allowance, housing allowance, etc.

Click **Payroll > Basic Setting > Allowance Type**. The allowance types can be added with code.

7.1.4 Deduction Type

In this interface, you can define all types of deduction.

Click **Payroll > Basic Setting > Deduction Type**.

7.2 Formula

7.2.1 OT formula

The formula for different types of OT can be defined according to the organizational rules.

Click **Payroll > Formula > OT Formula** to go to OT formula interface and you can see the current OT formulas that have been made.

Adding an OT Formula

In this interface, you can add overtime formula with description.

1. Click **Payroll > Formula > OT formula > Add** to go to Add OT formula interface.

7.2.2 Exception Formula

In this interface, you can add the formula for exception.

Click **Payroll > Formula > Exception Formula > Add** to go to Add Exception formula interface.

7.2.3 Leave Formula

In this interface, you can add a formula if in case an employee apply for leave.

Click **Payroll > Formula > Leave Formula > Add** to go to leave formula interface.

7.3 Salary Structure

In this interface, you can see the list of employees who are having a defined salary structure.

Click **Payroll > Salary Structure > Payroll Setting**. The basic salary, OT formula, exception formula, and leave formula of employees can be defined here.

7.4 Salary Change

It is showing in this interface the list of employees that have salary increments or changes in their salaries.

To add a salary change click **Payroll > Salary Change > Add** to go to the add salary change interface. The salary change in the can be updated here for further calculation.

7.5 Allowance

Allowance interface displays the records of employee allowances.

You can add employee allowances and define it by clicking **Payroll > Allowance > Add**.

7.6 Deduction

Deduction interface allows you to see the deduction amount list that is defined on each employee.

You can add a deduction type on employee by click **Payroll > Deduction > Add**.

7.7 Expense

In this interface, the expense amount is listed along with the employee details.

To add an expense, click **Payroll > Expense > Add**.

7.8 Cash Advance


In this interface, the cash advance is listed along with the employee details.

To add a cash advance, click **Payroll > Cash Advance > Add**.

7.9 Payroll Report

The salary reports are available in different formats: salary formula, salary change, salary detail, monthly salary, or WPS report format. All the reports can be filtered employee wise or department wise. Payroll reports can be exported in PDF, XLS, or CSV format. There are statistics available for both payroll and attendance.

The **Save Layout** is used to set a fixed format and **Default Layout** to return in original.

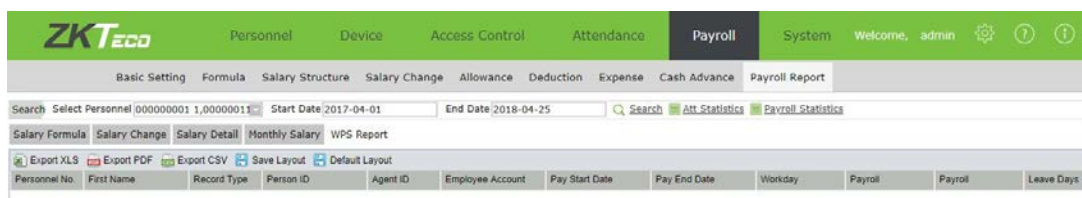

7.9.1 Salary Formula Report

ZKTECO
ZKTECO CO., LTD.

| Salary Formula | | | | | | | | | | | | | | | | |
|----------------|------------|------------|-----------|--------------|-------------|------------|------------|-------------|-------------|--------|------------|--------------|-----------------|---------------------|--------------|---------------|
| Personnel No. | First Name | Department | Position | Basic Salary | Normal OT | Weekend OT | Holiday OT | Late | Early Leave | Absent | Sick Leave | Casual Leave | Maternity Leave | Compassionate Leave | Annual Leave | Business Trip |
| 000000006 | Dinesh | Marketing | Marketing | 5000 | | | | | | | | | | | 50 Per Day | |
| 000000005 | Suresh | Project | Project | 8500 | 50 Per Hour | | | 10 Per Hour | | | | | | | | 100 Per Day |
| 000000004 | Omkar | Marketing | Marketing | 5000 | | | | 10 Per Hour | | | | | | | | |
| 000000001 | Raquel | HR | HR | 12000 | 50 Per Hour | | | | | | | | | | | 100 Per Day |

7.9.2 Salary Change Report



ZKTECO CO., LTD.

Salary Change

| Personnel No. | First Name | Last Name | Department | Position | Original Salary | Updated Salary | Increment | Issue Date | Weekday | Remarks |
|---------------|------------|-----------|------------|-----------|-----------------|----------------|-----------|------------|----------|------------------|
| 000000001 | Raquel | | HR | HR | 10000 | 12000 | 2000 | 2017-02-23 | Monday | Salary Increment |
| 000000004 | Omkar | | Marketing | Executive | 4000 | 5000 | 1000 | 2017-02-30 | Thursday | Salary Increment |
| 000000004 | Suresh | | Project | Engineer | 7000 | 8500 | 1500 | 2017-03-15 | Tuesday | Salary Increment |

7.9.3 Salary Detail Report



ZKTECO CO., LTD.

Salary Detail

| Personnel No. | First Name | Last Name | Department | Position | Date | Weekday | Basic Salary | Currency | Normal OT | Weekend OT | Holiday OT | Late | Early Leave | Absent | Leaves | Allowances | Deductions | Expense | Cash Advance |
|---------------|------------|-----------|------------|----------------|------------|-----------|--------------|----------|-----------|------------|------------|------|-------------|--------|--------|------------|------------|---------|--------------|
| 000000001 | Raquel | | HR | Manager | 2017-03-21 | Monday | 12000 | AED | | | | | | | | | | | 1000 |
| 000000005 | Suresh | | Project | Engineer | 2017-03-21 | Monday | 8500 | AED | | | | | | | | | | | |
| 000000004 | Omkar | | Marketing | Executive | 2017-03-21 | Monday | 5000 | AED | | | | | | | | | | | |
| 000000006 | Dinesh | | Marketing | Executive | 2017-03-21 | Monday | 5000 | AED | | | | | | | | | | | |
| 000000007 | Shilpa | | IT | Engineer | 2017-03-21 | Monday | 3000 | AED | | | | | | | | | | | |
| 000000007 | Shilpa | | IT | Engineer | 2017-03-22 | Tuesday | 3000 | AED | | | | | | | | | | | |
| 000000006 | Dinesh | | Marketing | Executive | 2017-03-22 | Tuesday | 3000 | AED | | | | | | | | | | | |
| 000000004 | Omkar | | Sales | Representative | 2017-03-22 | Tuesday | 5000 | AED | | | | | | | | | | | |
| 000000005 | Suresh | | Project | Engineer | 2017-03-22 | Tuesday | 8500 | AED | | | | | | | | | | | |
| 000000001 | Raquel | | HR | Manager | 2017-03-22 | Tuesday | 12000 | AED | | | | | | | | | | | |
| 000000001 | Raquel | | HR | Manager | 2017-03-23 | Wednesday | 12000 | AED | | | | | | | | 50 | | 505 | |
| 000000005 | Suresh | | Project | Engineer | 2017-03-23 | Wednesday | 8500 | AED | | | | | | | | 50 | | 505 | 2000 |
| 000000004 | Omkar | | Sales | Representative | 2017-03-23 | Wednesday | 5000 | AED | | | | | | 2 | 50 | 505 | | 2000 | |
| 000000006 | Dinesh | | Marketing | Executive | 2017-03-23 | Wednesday | 5000 | AED | | | | | | | | | | 505 | |
| 000000007 | Shilpa | | IT | Engineer | 2017-03-23 | Wednesday | 5000 | AED | | | | | | | | | | 505 | |

7.9.4 Monthly Salary Report



ZKTECO CO., LTD.

Monthly Salary

| Employee | Personnel No. | First Name | Last Name | Department No. | Department | Position No. | Position | Month | Basic Salary | Currency | Normal OT | Weekend OT | Holiday OT | Late | Early Leave | Absent | Leaves | Allowances | Deductions | Expense | Cash Advance | Salary | |
|----------|---------------|------------|-----------|----------------|------------|--------------|-----------|---------|--------------|----------|-----------|------------|------------|------|-------------|--------|--------|------------|------------|---------|--------------|-----------|----------|
| S211 | 000000001 | Raquel | | 1 | HR | | Manager | 2017-01 | 12000 | AED | | | | | | | | 200 | -100.00 | 600 | -1000 | 11700 AED | |
| S212 | 000000005 | Suresh | | 1 | Project | | Engineer | 2017-02 | 8500 | AED | | | | | | | | 100 | -100.00 | 850 | -2000 | 7350 AED | |
| S213 | 000000004 | Omkar | | 1 | Marketing | | Executive | 2017-03 | 5000 | AED | | | | | | | | 50 | -100.00 | 505 | -2000 | 3455 AED | |
| S214 | 000000006 | Dinesh | | 1 | Marketing | | Executive | 2017-03 | 5000 | AED | | | | | | | | | | 505 | | | 5505 AED |

7.9.5 WPS Report

| Base Formula Salary Structure Increment Allowance Deduction Expense Cash Advance Payroll Report | | | | | | | | | | | |
|--|----------------|-------------|-------------------------|------------|-------------------------|----------------|------------|-----------------|------------|---------------------|------------|
| Search Select Personnel 000007111 SAM,00000 Start Date 2017-06-01 End Date 2017-06-30 Search Att Statistics Payroll Statistics | | | | | | | | | | | |
| Salary Formula Salary Change Salary Detail Monthly Salary WPS Report | | | | | | | | | | | |
| Export XLS Export PDF Export CSV Save Layout Default Layout | | | | | | | | | | | |
| Personnel No | First Name | Record Type | Person ID | Agent ID | Employee Account | Start Date | End Date | Days in Period | Salary | Variable Salary | Leave Days |
| 000007111 | SAM | EDR | 10007118747528 | 703420114 | AE470340003708202783401 | 2017-06-01 | 2017-06-30 | 30 | 7600.00 | 1250.00 | 2.00 |
| 000000712 | GEMS | EDR | 20507198747527 | 798798457 | AE850820278570125784598 | 2017-06-01 | 2017-06-30 | 30 | 4562.00 | 418.50 | |
| Record Type | Person ID | Agent ID | Employee Account | Start Date | End Date | Days in Period | Salary | Variable Salary | Leave Days | | |
| EDR | 10007118747528 | 703420114 | AE470340003708202783401 | 2017-06-01 | 2017-06-30 | 30 | 8050.00 | 500.00 | | 2 | |
| EDR | 35607845687258 | 703420114 | AE587456965387422546798 | 2017-06-01 | 2017-06-30 | 30 | 4525.00 | 0.00 | | 1 | |
| EDR | 10250696144354 | 203450147 | AE544984565987856516514 | 2017-06-01 | 2017-06-30 | 30 | 7000.82 | 0.00 | | 0.5 | |
| EDR | 25897528497963 | 506789425 | AE798745606309856565165 | 2017-06-01 | 2017-06-30 | 30 | 4500.00 | 0.00 | | 0 | |
| EDR | 14525684767219 | 842427684 | AE164564645789798788945 | 2017-06-01 | 2017-06-30 | 30 | 6000.00 | 250.00 | | 0 | |
| SCR | 00000054789645 | 522789564 | 2017-07-09 | 1219 | 62017 | 5 | 30825.82 | AED | | ZKTeco Security LLC | |

WPS Report Description

| EDR (Employee Detail Record) | | | | |
|------------------------------|------------------|-----------|--------------|---|
| Column | Field Label | Max. Size | Type | Description |
| A | Record Type | 03 | Alphabet | Must be EDR |
| B | Person ID | 14 | Alphanumeric | The Unique Identifier as provided by Ministry of Labour . This information will be printed on the Employee Labour Cards. If the number mentioned is less than 14 digits, in the file the field should be prefixed with zeros to add the count to 14 digits. |
| C | Agent ID | 09 | Numeric | This is the 9 digit routing code which is assigned to the Employee's Bank/Agent where their account is held. All UAE Banks and Exchanges have their routing codes. |
| D | Employee Account | 23 | Alphanumeric | Employee's account number as provided by the Bank/Agent where the salary is to be credited. |
| E | Pay Start Date | 10 | Date | The Pay Start Date . Should be entered in YYYY-MM-DD format. For eg: If the salary payment is for the month July 2017, then the Pay Start Date should be "2017-07-01". Note: This date cannot be less than 2017-07-01 |
| F | Pay End Date | 10 | Date | The Pay End Date . Should be entered in YYYY-MM-DD format. For eg: If the salary payment is for the month July 2017, then the Pay End Date should be "2017-07-31". Note: This date must be greater than the date indicated in Column E |
| G | Days in Period | 04 | Numeric | The number of Calendar days for which the Salary is being paid. For Eg: If the salary is being paid for the full month of July which has 31 days in total, then the value entered should be entered as "31" |
| H | Salary | 15 | Numeric | Enter the Fixed Salary amount paid to the employee. This should include all fixed salary components such as Basic Salary, Accommodation Allowance, Transport Allowance etc. This must be calculated as [Sum of all Fixed Components (paid Monthly) - Deductions (Monthly deductions such as Leaves, Late times, Early leaving times, Absence times)] . Valid amount (eg: 5827.57 / 27.00 / 57). If no contribution for this component, then type 0.00 in this column. Note: Negative amounts are not permitted and the file will be rejected. |
| I | Variable Salary | 15 | Numeric | Enter the Variable Salary amount paid to the employee. This should include all variable salary components such as OverTime (Normal/Weekend/Holiday), any Incentives, Bonus etc. This must be calculated as [Sum of all Variable Components which is paid monthly such OT, any Paid Leaves, any incentives, bonus etc] . Valid amount (eg: 5827.57 / 27.00 / 57). If no contribution for this component, then type 0.00 in this column. Note: Negative amounts are not permitted and the file will be rejected. |
| J | Leave Days | 04 | Numeric | The number of days the employee has been on leave without pay in the pay period. If no leave has been availed off then enter "0" in this column. |

| SCR (Salary Control Record) | | | | |
|-----------------------------|-------------------------------------|-----------|--------------|---|
| Column | Field Label | Max. Size | Type | Description |
| A | Record Type | 03 | Alphabet | Must be SCR |
| B | Employer Unique ID | 35 | Alphanumeric | The Unique ID (Establishment ID) of the Company issued by the Ministry of Labour . This field shall be validated against the database held in WPS. This ID can vary in length from 13 to 35. Note: If the length is less than the maximum specified length of 13 digits, then this field should be padded with leading zeros. |
| C | Routing Code of the Employer's Bank | 09 | Numeric | This is the 9 digit routing code which is assigned to the Employer's Bank where the corporate account is held. |
| D | File Creation Date | 10 | Date | Must be in YYYY-MM-DD format. For Eg: If the file is prepared by the employer on 28th July 2017, then the date mentioned will be 2017-07-28 |
| E | File Creation Time | 04 | Numeric | Must be in HHMM format. For Eg: If the file is prepared by the employer at 4.30pm, then the time mentioned will be 1630. |
| F | Salary Month | 06 | Numeric | Must be in MMYYYY format. The actual month for which the salary is being paid. For Eg: If the salary payment is being done for the month of July 2017, then the month will be mentioned as 072017 |
| G | EDR Count | 10 | Numeric | The Total number of Employees for whom the salary is being paid. |
| H | Total Salary | 15 | Numeric | Total Salary amount paid to the Employees. This will be validated to be equal to the sum of all fixed and variable salary components indicated in all the EDR records in the file. |
| I | Payment Currency | 03 | Alphabet | Currency is always assumed to be in AED |
| J | Employer Reference | 35 | Alphanumeric | This is a documentary field to be entered by the Employer if they maintain a unique file identifier at their end. If not applicable then the field can be left |

Chapter 8 System Settings

The system setting is to assign system users (such as company management personnel, registrars, and statistics clerk), configure roles for corresponding users, and set system parameters, notices, reminders and operation logs.


8.1 System User Management

8.1.1 Role Management

When using the system, a super user needs to assign different levels to new users. To avoid setting users one by one, you can set roles with specific levels in role management, and assign appropriate roles to users when adding users. The permissions of four functional modules are included: personnel, device, attendance and system. The default super users of the system have all privileges permissions and can assign new users based on requirements and set corresponding roles (permission) for them.

Adding a role

1. Choose **System > Role > Add** to access the Add Role interface.

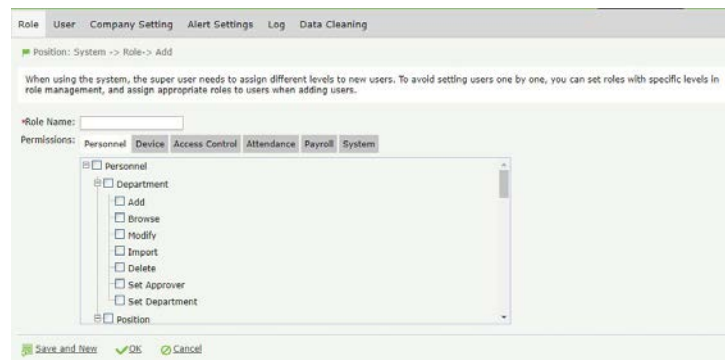

Note: Select corresponding permissions based on the selected permission type.

- **Role Name:** Enter the object type, namely the role name (such as the personnel staff and device administrator).
 - **Permissions:** The permissions of four categories are included: Personnel, Device, Attendance and System. In the operation permission list under each permission type tab, tick the check box in front of the operation permission to select the permission, or click the highest permission in the list to select all the sub-permissions under it. For example, click Personnel with the highest permission. Then, all sub-permissions under it such as Department, Position, Personnel, Resignation, and Issue Card will be selected.
2. After the completion of the setting, click **OK** to save the settings and return to the Role interface. The role list will display the new roles.

Editing a role

1. In the role list, click the role name or click **Edit** under Related Operation in the line of the role to be edited to access the interface for editing roles.
2. Modify the parameter settings based on requirements (refer to the parameter setting method in "Adding a role").
3. After the completion of the modification, click **OK** to save the modified role information.

Deleting a role

1. In the role list, select a role to be deleted, and click **Delete** on the upper part of the interface or click **Delete** under Related operation in the line of the role to be deleted to access the role deletion interface.
2. Click **OK** to confirm the deletion of the selected role.

8.1.2 User Management

Add new users to the system and assign roles (permissions) to users.

Adding a user

1. Choose **System > User > Add** to access the Add User interface.

Role: User Company Setting Alert Settings Log Data Cleaning

Position: System -> User -> Add

If check box 'Activate' is not selected then the user will be disabled and cannot log in to the system!

*Username:
Required: 30 characters or fewer. Letters, numbers and @/./+/-/_ characters

*Password:
The length range is 4 to 18 digits. The default password is 111111.

*Confirm Password:
The length range is 4 to 18 digits. The default password is 111111.

Authorize Department:

If you select no department, you will possess all department rights by default.

Authorize Area:

If you select no area, you will possess all area rights by default.

First Name:

Last Name:

E-mail Address:

Staff Status: ☒ choose if the user can log in this admin site.

Super Status: ☐ choose if the user has all permissions

Role: ZKTECO

Fingerprint Registration [Fingerprint Registration](#)

Set the parameters as required based on the following steps (Parameters marked with * are mandatory):

- **Username:** 30 characters or fewer. Only letters or numbers are allowed.
 - **Password/Confirm Password:** The length range is 4 to 18 digits. The default password is 111111.
 - **Authorize Department:** Click ☐ and select a department from the popped up department drop-down list. (If you select no department, you will possess all department rights by default.)
 - **Authorize Area:** Click ☐ and select an area in the popped up area drop-down list. (If you select no area, you will possess all area rights by default.)
 - **Staff Status:** Designates whether the user can log into this admin site.
 - **Super Status:** Designates that this user has all permissions without explicitly assigning them.
 - **Role:** Roles need to be selected for non-superusers. Select a preset role, and the user has all operation permissions of this role.
- After the completion of the setting, click **OK** to save the settings and return to the User interface. The user list will display the new user.

Note: You can modify or delete existing users. Click **Edit** or **Delete** behind the username to perform corresponding operations. The detailed operations are the same as those in "Editing a role" and "Deleting a role."

8.2 Company Settings

The company settings interface includes the option to upload the company logo and company details. This company logo can be displayed in the report also if you select option 'show in report'.

- Choose **System > Company Setting** to access the Company Setting interface.

Role: User Company Setting Alert Settings Log Data Cleaning

Position: System -> Company Setting

Company Name:

Show in report: Right

Estd ID:

Agent ID:

Currency:

Email:

Phone Number:

Nationality:

☒ Show in report: Right

8.3.5 E-mail Sending Test

User can send test email to check whether the email sending server settings is working fine or not.

Testing Email Sending

Enter the Receiver ID, Subject, Content and Click on 'OK' to test email sending.

8.4 Log Record


The default main interface of Log displays all operation log records in the system.

Choose **System > Log** to access the Log interface. Due to the large data amount, you can use the search function to search for required log records. Please refer to Appendix for detailed operations.

8.5 Data Cleaning

Clean up the data in the system, including log records, expired folder uploaded from devices, failed commands, device communication log, temporary file and user's session records.

1. Choose **System > Data Cleaning** to access the Data Cleaning interface.
 - **Clean Up Data Before:** Set the date. Please refer to Date Selection in Appendix for the method of setting the date. The data records before the set date are cleared.
 - **Choose Items To Clean:** Select the items to be cleaned.

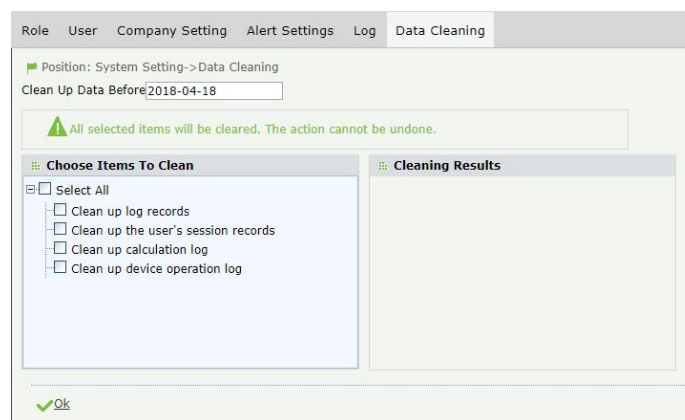

Note: The data cannot be restored after being cleaned. Please be careful with the operation.

2. After completion of the setting, click **OK** to clean up the selected items. After the cleaning success, the Cleaning results area will display the cleaning results.

Chapter 9 Appendices

Appendix 1

Personnel Selection

The following uses the operation of adding a person to an area as an example.

1. Choose **Attendance > Zone > Add Personnel** to access an interface as shown in the figure below.

You can search for personnel in two ways:

- **Search by Department:** Tick the check box to the left of Department in the department list of the drop-down menu, and all personnel in the department are selected. If Select All Personnel in the Department is selected, all personnel in the department are selected, and are displayed in the Selected Personnel list.
 - **Search by Personnel No. / Name:** Enter the name and number of the employee to be queried in the query box, click. Then, information on the employee who meets the search criteria is displayed in the personnel list box. Click the check box in front of the employee so that information about the employee is displayed in the Selected Personnel list.
2. If the selected personnel are displayed in the Selected Personnel list and you need to delete one or more employees, deselect the check box in front of the employees. If you need to clear all selected personnel, click **Clear**.

Date Selection

The following uses the operation of setting resignation date on the Add New Departure interface as an example.

1. Click the input box to the right of Resignation Date. The system automatically displays a date selection box as shown in the figure below.

2. Select a year from the popped up year drop-down list (by default, the system displays the year of the current date).
3. Select a month from the popped up month drop-down list (by default, the system displays the month of the current date).
4. Otherwise, you can click the required date in the date selection box.
5. Click **OK** and the selected date is displayed to the right of Resignation Date, as shown in the figure below.

- **Ct (Current):** Click **Ct** to set the date to the current date.
- **Del (Delete):** Click **Del** to clear the selected date if you want to re-select the date.

Time Selection

The following uses the operation of setting the check-in start time on the Add Timetable interface as an example.

1. Click the setup box to the right of Check-in Start Time. Then, a time setup box as shown in the figure below is displayed.

1. Click the hour box. The hour selection box is displayed, as shown in the figure below and click the time in the hour selection choice box to select an hour or enter an hour in the hour box manually.
- 2.

3. Click the minute box. The minute selection box is displayed then click the time in the minute selection box to select a minute or you can enter a minute in the minute box manually.
 4. Click the second box. The second selection box is displayed then click the time in the second selection box to select a second or you can enter a second in the second box manually.
 5. After the completion of setting the hour, minute, and second, click **OK** to save the settings.
- **Ct (Current):** Click **Ct** to set the time to the current time.
 - **Del (Delete):** Click **Del** to clear the selected time if you want to re-select the time.

Import

The following uses the operation of importing personnel information as an example. If there are electronic personnel or department records available, which may be information about the personnel, department or human resource system in other software or devices, you can import the information to the system through the Import function.

1. Choose **Personnel > Personnel > Import** to access the Import Personnel interface.

| | A | B | C | D | E |
|---|---------------|------------|----------------|--------------|----------|
| | Personnel No. | First Name | Department No. | Position No. | Card No. |
| 1 | 300 | David | 1 | 2 | 1 |
| 2 | 600 | Fadi | 2 | 1 | 123 |
| 3 | 500 | Wade | 1 | 1 | 34 |
| 4 | 600 | James | 1 | 1 | 88 |
| 5 | 700 | Sal th | 1 | 1 | 9 |

Description:
 1.Import template requires header
 2.Personnel No., First Name and Department No. are required fields
 3.All fields must be in text format
 Get import templates

Note: Users can click **Get Import Templates** to obtain and save the personnel importing template, and fill in and save corresponding personnel information. Users can use the personnel import function to import the personnel information of the file (XLS file) to the system.

2. Click **Choose File** and the Open dialog box is displayed, then select the file to be imported and click Open or directly double-click the file to be imported.
3. After file selection, the address of the selected file is displayed next to Choose File.

Note: Only XLS and CSV files can be imported.

- **Duplicate Personnel No.:** When Not Import is selected, records with the identical personnel number with the system personnel number are not imported. When Cover is selected, records with the identical personnel number with the system personnel number directly replace the records with the identical personnel number in the system.
4. After completion of the setting, click **OK** to start importing the records. After the importing success, the system automatically returns to the Personnel interface, which will display the imported personnel information.


Notes:

- A table header is required for importing templates.
- Personnel No., First Name, and Department No. are mandatory, and other fields are optional.

Export

The following uses the operation of exporting personnel list as an example.

1. Choose **Personnel > Personnel > Export** to access the Export Personnel interface. When there is a large amount of data, it is recommended to click Select Number of records to export to accelerate exporting speed and reduce system load.

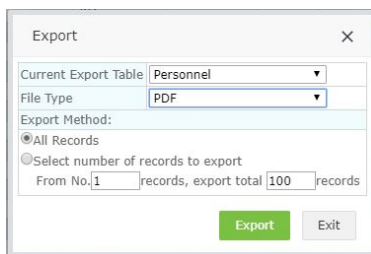

2. **File Type:** If you select PDF file for exporting, click **Export** to directly export the file.


Notes:

- The exported table is the currently displayed list, namely, the list of queried or displayed results.
- A maximum of 10,000 latest records can be exported.

Log View

The following uses the operation of viewing personnel operation logs as an example.

1. Choose **Personnel > Personnel > Log** to access the Logs interface, as shown in the figure below.

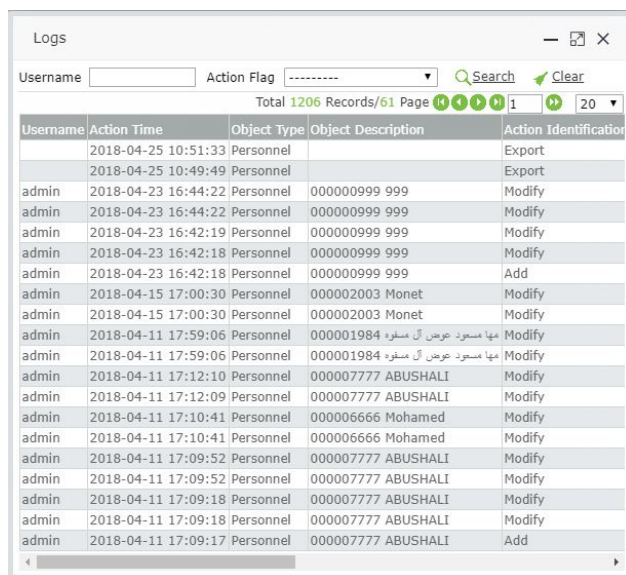

| Username | Action Time | Object Type | Object Description | Action Identification |
|----------|---------------------|-------------|------------------------------------|-----------------------|
| | 2018-04-25 10:51:33 | Personnel | | Export |
| | 2018-04-25 10:49:49 | Personnel | | Export |
| admin | 2018-04-23 16:44:22 | Personnel | 000000999 999 | Modify |
| admin | 2018-04-23 16:44:22 | Personnel | 000000999 999 | Modify |
| admin | 2018-04-23 16:42:19 | Personnel | 000000999 999 | Modify |
| admin | 2018-04-23 16:42:18 | Personnel | 000000999 999 | Modify |
| admin | 2018-04-23 16:42:18 | Personnel | 000000999 999 | Add |
| admin | 2018-04-15 17:00:30 | Personnel | 000002003 Monet | Modify |
| admin | 2018-04-15 17:00:30 | Personnel | 000002003 Monet | Modify |
| admin | 2018-04-11 17:59:06 | Personnel | 000001984 منها مسعود عريض آل مسعود | Modify |
| admin | 2018-04-11 17:59:06 | Personnel | 000001984 منها مسعود عريض آل مسعود | Modify |
| admin | 2018-04-11 17:12:10 | Personnel | 000007777 ABUSHALI | Modify |
| admin | 2018-04-11 17:12:09 | Personnel | 000007777 ABUSHALI | Modify |
| admin | 2018-04-11 17:10:41 | Personnel | 000006666 Mohamed | Modify |
| admin | 2018-04-11 17:10:41 | Personnel | 000006666 Mohamed | Modify |
| admin | 2018-04-11 17:09:52 | Personnel | 000007777 ABUSHALI | Modify |
| admin | 2018-04-11 17:09:52 | Personnel | 000007777 ABUSHALI | Modify |
| admin | 2018-04-11 17:09:18 | Personnel | 000007777 ABUSHALI | Modify |
| admin | 2018-04-11 17:09:18 | Personnel | 000007777 ABUSHALI | Modify |
| admin | 2018-04-11 17:09:17 | Personnel | 000007777 ABUSHALI | Add |

Notes:

- The Logs interface displays only the operation logs of the current operation module.
- Logs under some operation menus can be viewed only on the edit interface.

Query Function

The following uses the operation of viewing personnel as an example.

Choose **Personnel** > **Personnel** to access the Personnel interface.

- **Fuzzy query:** Enter the search conditions in the corresponding search fields (such as First Name, Personnel No., or Department), and click **Search**. The data area in the lower part displays the search results.

The screenshot shows the 'Personnel' interface with a search bar at the top. Below the search bar, there is a table with columns: Personnel No., First Name, Card No., Department No., Department, Position No., Position, Gender, Privilege, Area, Fingerprint, Face, Finger Vein, Palm, and Isolated Operation. The table contains one row of data for a personnel member with ID 111.

- **Advanced query:** Click **Advanced** to access the Advanced Query interface.

The screenshot shows the 'Advanced Query' dialog box. It has three main sections: 'Select Search Field', 'Select Condition', and 'Range'. The 'Select Search Field' dropdown is set to 'Position'. The 'Select Condition' dropdown is set to 'Equal To'. The 'Range' field is empty. Below these fields is a 'Conditions Selected' list. At the bottom, there are buttons for 'Add', 'Clear', 'Search', and 'Return'. A note at the bottom states: '*Note: For selecting of the same field or same conditions, the last selection is prevailing.'

1. Select the search field from the Select Search Field drop-down list.
2. Select Equal to Null, Including, Any and Equal To in the Select Condition.
3. Enter the search conditions in the Range field.
4. Click **Add**. The search conditions are displayed in the list beneath Conditions Selected, and multiple search conditions can be selected. The same field and the same condition can be selected only once.

For example, the conditions for advanced query are set as follows:

The screenshot shows the 'Advanced Query' dialog box with the following settings: 'Select Search Field' is 'Position', 'Select Condition' is 'Equal To', and 'Range' is 'Sales Representative'. The 'Conditions Selected' list contains three entries: 'Department Equal To ZKTeco', 'Personnel No. Equal To 2003', and 'Position Equal To Sales Representative'. At the bottom, there are buttons for 'Add', 'Clear', 'Search', and 'Return'. A note at the bottom states: '*Note: For selecting of the same field or same conditions, the last selection is prevailing.'

5. Click **Search**. The search results are displayed in the returned list.

The query functions under various operation menus in the system are basically the same, and only differ in the settings of query fields. Enter corresponding content in the fields according to the prompts.

Selection of Date and Time

The following example uses the operation of setting the start time on the Add Leave interface.

1. Choose **Attendance > Approvals > Leave > Add** to access the Add Leave interface.
2. Click the setup box to the right of Start Time. The date and time setup box is displayed, as shown in the figure below.

The screenshot shows the 'Add Leave' interface. At the top, there are tabs: Rule, Timetable, Shift, Schedule, Approvals, Transactions, and Attendance Report. Below the tabs, the breadcrumb path is 'Position: Attendance -> Leave -> Add'. The main section is titled 'Add'. Under 'Personnel:', there are two search options: 'Search By Department' (selected) and 'Search By Personnel No./Name'. Below these is a checkbox 'Select All Personnel In The Department'. A table displays a list of personnel with columns for Personnel No., First Name, and Department. The table shows 386 records, with the first 7 records visible. Below the table, there are fields for 'Start Time:', 'End Time:', and 'Leave Type:'. The 'End Time:' field is set to '2018 Apr'. The 'Leave Type:' field is set to 'Reason:'. Below these fields is a calendar grid showing the days of the week and the dates. The date '25' is selected. At the bottom, there is a time selection box showing '17:41:00' and buttons for 'Ct', 'Del', and 'OK'.

| Personnel No. | First Name | Department |
|---------------|------------|------------|
| 000000001 | 1 | ZKTeco |
| 000000115 | 115 | ZKTeco |
| 000000116 | 116 | ZKTeco |
| 000000117 | 117 | ZKTeco |
| 000000118 | 118 | ZKTeco |
| 000000119 | 119 | ZKTeco |
| 000000120 | 120 | ZKTeco |

3. Select the date and time.

Appendix 2 END USER LICENSE AGREEMENT

Important: Read carefully.

This End-User License Agreement ("EULA") is a legal agreement between you (either an individual or a single entity) and the mentioned author of this Software for the software product identified above, which includes computer software and may include associated media, printed materials, and "online" or electronic documentation ("SOFTWARE PRODUCT"). By installing, copying, or otherwise using the SOFTWARE PRODUCT, you agree to be bound by the terms of this EULA. If you do not agree to the terms of this EULA, do not install or use the SOFTWARE PRODUCT.

SOFTWARE PRODUCT LICENSE

The SOFTWARE PRODUCT is protected by copyright laws and international copyright treaties, as well as other intellectual property laws and treaties. The SOFTWARE PRODUCT is licensed, not sold.

1. **GRANT OF LICENSE.** This EULA grants you the following rights: Installation and Use. You may install and use an unlimited number of copies of the SOFTWARE PRODUCT.
Reproduction and Distribution. You may reproduce and distribute an unlimited number of copies of the SOFTWARE PRODUCT; provided that each copy shall be a true and complete copy, including all copyright and trademark notices, and shall be accompanied by a copy of this EULA. Copies of the SOFTWARE PRODUCT may be distributed as a standalone product or included with your own product.
2. **DESCRIPTION OF OTHER RIGHTS AND LIMITATIONS.** Limitations on Reverse Engineering, Recompilation, and Disassembly. You may not reverse engineer, decompile, or disassemble the SOFTWARE PRODUCT, except and only to the extent that such activity is expressly permitted by applicable law notwithstanding this limitation.

Separation of Components

The SOFTWARE PRODUCT is licensed as a single product. Its component parts may not be separated for use on more than one computer.

Software Transfer

You may permanently transfer all of your rights under this EULA, provided the recipient agrees to the terms of this EULA.

Termination

Without prejudice to any other rights, the Author of this Software may terminate this EULA if you fail to comply with the terms and conditions of this EULA. In such event, you must destroy all copies of the SOFTWARE PRODUCT and all of its component parts.

Distribution

The SOFTWARE PRODUCT may not be sold or be included in a product or package which intends to receive benefits through the inclusion of the SOFTWARE PRODUCT. The SOFTWARE PRODUCT may be included in any free or non-profit packages or products.

3. **COPYRIGHT.** All title and copyrights in and to the SOFTWARE PRODUCT (including but not limited to any images, photographs, animations, video, audio, music, text, and "applets" incorporated into the SOFTWARE PRODUCT), the accompanying printed materials, and any copies of the SOFTWARE PRODUCT are owned by the Author of this Software. The SOFTWARE PRODUCT is protected by copyright laws and international treaty provisions. Therefore, you must treat the SOFTWARE PRODUCT like any other copyrighted material except that you may install the SOFTWARE PRODUCT on a single computer provided you keep the original solely for backup or archival purposes.

LIMITED WARRANTY

NO WARRANTIES

The Author of this Software expressly disclaims any warranty for the SOFTWARE PRODUCT. The SOFTWARE PRODUCT and any related documentation is provided "as is" without warranty of any kind, either express or implied, including, without limitation, the implied warranties or merchantability, fitness for a particular purpose, or no infringement. The entire risk arising out of use or performance of the SOFTWARE PRODUCT remains with you.

NO LIABILITY FOR DAMAGES

In no event shall the author of this Software be liable for any damages whatsoever (including, without limitation, damages for loss of business profits, business interruption, loss of business information, or any other pecuniary loss) arising out of the use of or inability to use this product, even if the Author of this Software has been advised of the possibility of such damages.

Acknowledgment of Agreement

I have carefully read and understand this Agreement, ZKTECO CO., LTD.'s Privacy Policy Statement.

If YOU ACCEPT the terms of this Agreement: I acknowledge and understand that by ACCEPTING the terms of this Agreement.
If YOU DO NOT ACCEPT the terms of this Agreement: I acknowledge and understand that by refusing to accept these terms, I have rejected this license agreement and therefore have no legal right to install, use, or copy this Product or the Licensed Software that it incorporates.



For any clarifications regarding the User Manual, please contact us through e-mail at **softwaresupport@zkteco.com**.

ZKTeco Middle East

Office 1207, Floor 112, Arenco Tower, Media City, Dubai, U.A.E

Tel. No: +971 4 3927649

E-mail: zk_me@zkteco.com

www.zkteco.me

